

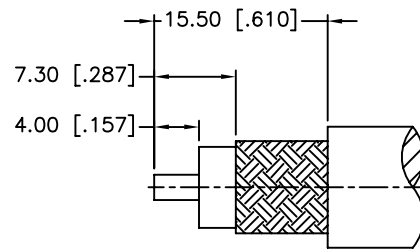
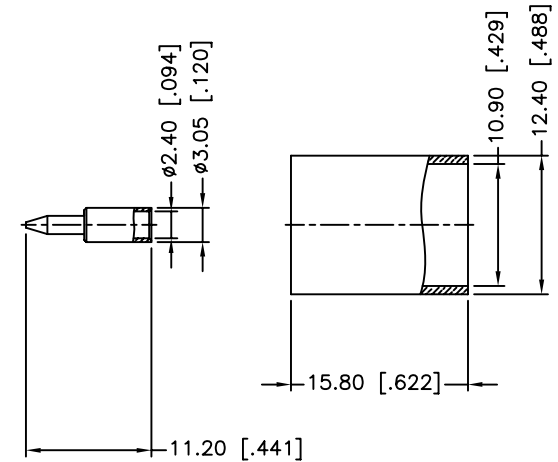


REV.	DATE	ECR NO.	DESCRIPTION
NC	06/24/10	XXXXX	INITIAL RELEASE

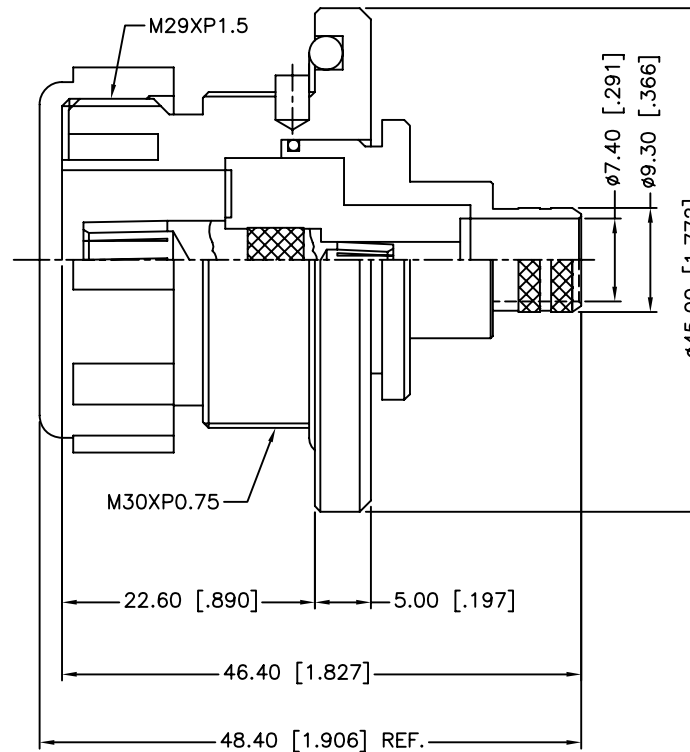

RECOMMENDED
CABLE STRIPPING DIM'S

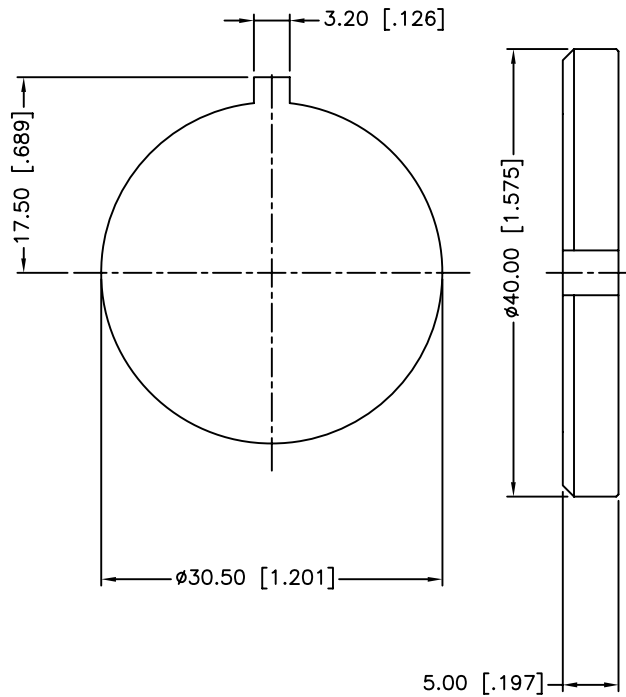

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .100"

11	SPANNER NUT	BRASS	NEXCOTE	1
10	FERRULE	BRASS	NEXCOTE	1
9	CONTACT PIN	BRASS	SILVER	1
8	COVER	PE	BLUE	1
7	GASKET	N.B.R.	BLACK	1
6	POST	BRASS	NEXCOTE	1
5	BARREL	BRASS	NEXCOTE	1
4	GASKET	SILICONE	RED	1
3	CONTACT PIN	BERYLLIUM COPPER	SILVER	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	NEXCOTE	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm $\pm$ 0.20mm
8 - 30mm $\pm$ 0.40mm
30 - 120mm $\pm$ 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 $\pm$ 0.007"
.315 - 1.180 $\pm$ 0.015"
1.180 - 4.724 $\pm$ 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	06/24/10
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/272153.DWG	

Amphenol Connex

PART DESCRIPTION

7/16 BULKHEAD CRIMP JACK
(FOR RG8 AND RG213/U CABLE)

PART NO.

272153

DWG. NO.

272153.DWG

REV. NC

SIZE A

SCALE NA