
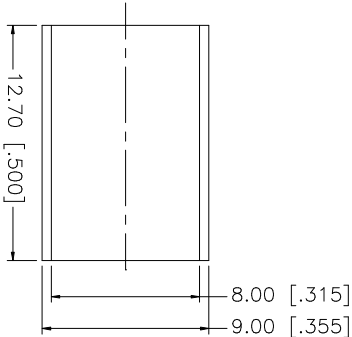

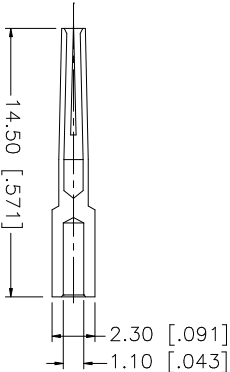
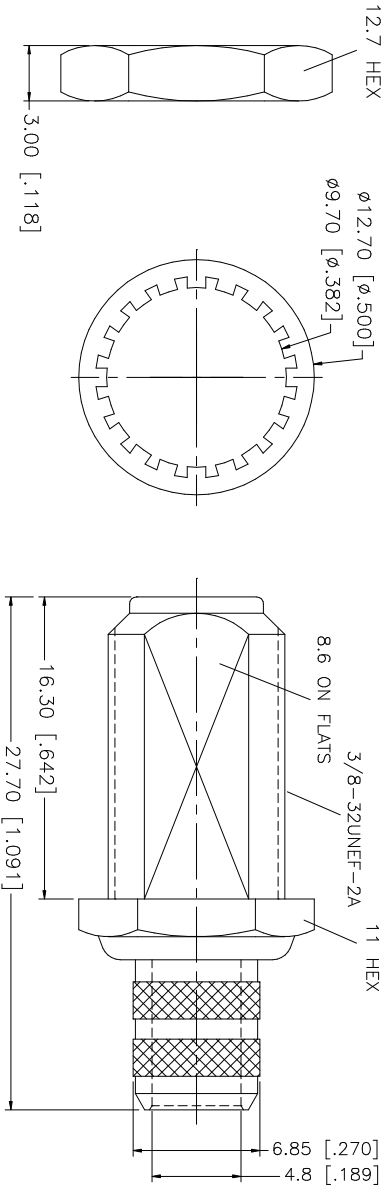


REV.	DATE	DESCRIPTION
A	03/18/03	MODIFY FERRULE

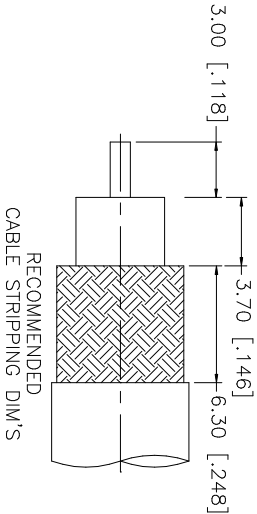

- NOTES:
- CRIMPED FERRULE
HEX CRIMP SIZE .320"
 - ACCEPTS Ø0.5 [.019] ~ Ø1.05 [.041]
CENTER CONDUCTOR TYPICAL

8				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex PART DESCRIPTION F BULKHEAD CRIMP JACK - FOR RG-6/U (CONTACT TO ACCEPT .041" CENTER CONTACT CABLE) PART NO. 222161-10
7				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	DRAWN	G.R.S.	
6	HEX NUT	BRASS	NICKEL	0.5 - 8mm ± 0.20mm	CHECKED		
5	LOCK WASHER	BRASS	NICKEL	8 - 30mm ± 0.40mm	ISSUED		
4	FERRULE	BRASS	NICKEL	30 - 120mm ± 0.50mm	SHEET	1 OF 1	
3	CONTACT PIN	PHOS. BRONZE	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:			
2	INSULATOR	TEFLON	NATURAL	.020 - .315 = ± 0.007"			
1	BODY	BRASS	NICKEL	.315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	CAD FILE		
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING		DWG. NO. 222161-10.DWG REV. A SIZE A SCALE NA