




REV.	DATE	ECR NO.	DESCRIPTION
NC	02/18/11	XXXXXX	INITIAL RELEASE

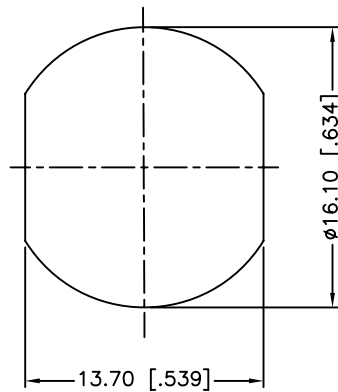

RECOMMENDED
MOUNTING HOLE



RECOMMENDED
CABLE STRIPPING DIM'S

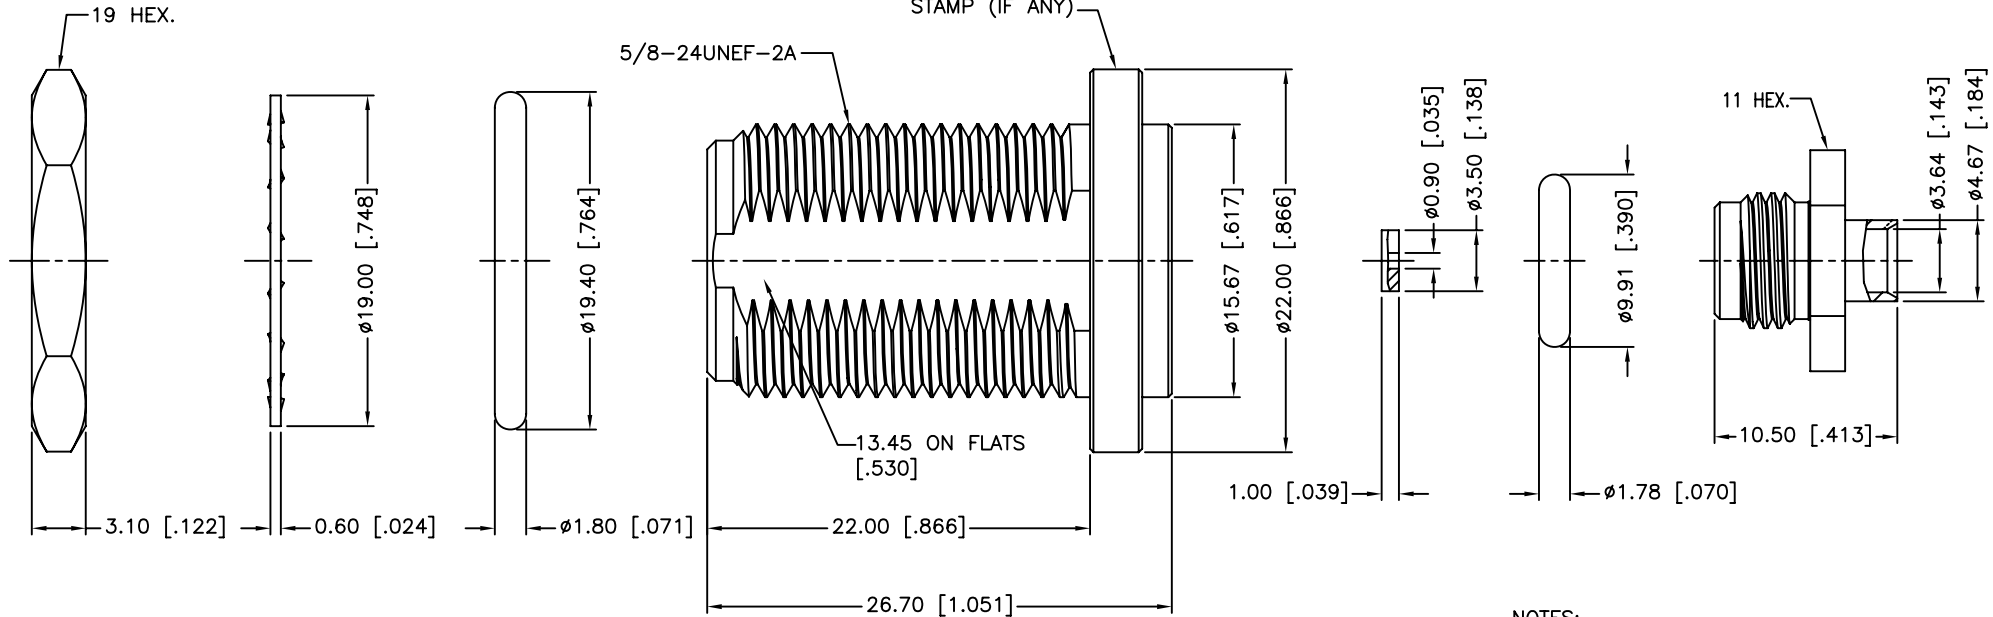

NOTES:

1. FREQUENCY RANGE: 0-6 GHz
2. VSWR (RETURN LOSS): 1.3 MAX.
3. CONNECTOR IS IP-67 COMPLIANT.
4. MAX. PANEL THICKNESS=6.5mm

11	O-RING	SILICONE	RED	1
10	HEX NUT	BRASS	NEXCOTE	1
9	LOCK WASHER	BRASS	NEXCOTE	1
8	GASKET	SILICONE	RED	1
7	SOLDER NUT	BRASS	GOLD	1
6	GASKET	SILICON RUBBER	RED	1
5	INSULATOR	TEFLON	NATURAL	1
4	CONTACT PIN	PHOS.BRONZE	GOLD	1
3	INSULATOR	TEFLON	NATURAL	1
2	INNER BODY	BRASS	NEXCOTE	1
1	BODY	BRASS	NEXCOTE	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	02/18/11
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE Y:/CONNEX/172137-10.DWG	

Amphenol Connex

PART DESCRIPTION

N BULKHEAD DIRECT SOLDER JACK,
IP-67 COMPLIANT(FOR .141 SEMI RIGID CABLE)

PART NO.

172137-10

DWG. NO. 172137-10

REV. NC

SIZE A

SCALE NA