



REV.	DATE	ECR NO.	DESCRIPTION
NC	08/17/09	XXXXXX	INITIAL RELEASE

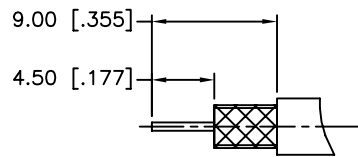

RECOMMENDED
CABLE STRIPPING DIM'S

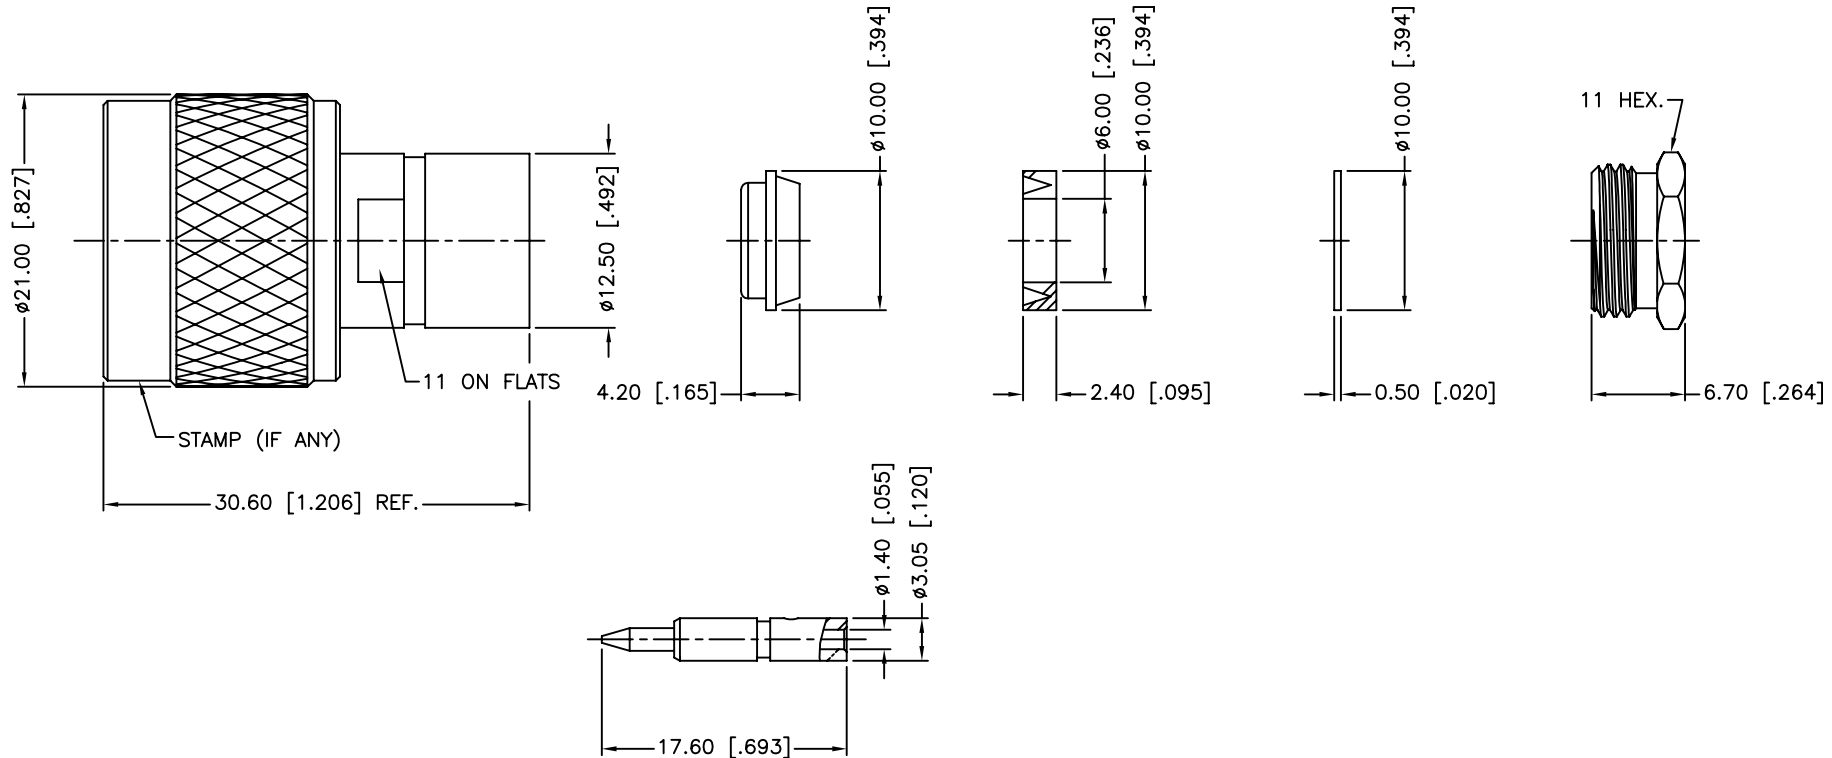

1. CRIMPED CONTACT PIN
HEX CRIMP SIZE .100"

11	CONTACT PIN	BRASS	GOLD	1
10	HEX NUT	BRASS	NEXCOTE	1
9	WASHER	BRASS	NEXCOTE	1
8	GASKET	SILICONE	RED	1
7	BRAID CLAMP	BRASS	NEXCOTE	1
6	RETAINING RING	SUS 304	NATURAL	1
5	GASKET	SILICONE	RED	1
4	CONTACT BODY	BRASS	NEXCOTE	1
3	INSULATOR	PTFE	NATURAL	1
2	BODY	BRASS	NEXCOTE	1
1	SHELL	BRASS	NEXCOTE	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE
IN MILLIMETERS. DIMENSIONS IN [] ARE IN
INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm $\pm$ 0.20mm
8 - 30mm $\pm$ 0.40mm
30 - 120mm $\pm$ 0.50mm

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR INCHES ARE:
.020 - .315 $\pm$ 0.007"
.315 - 1.180 $\pm$ 0.015"
1.180 - 4.724 $\pm$ 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN J.CHENG	08/17/09
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/172112.DWG

Amphenol Connex			
PART DESCRIPTION			
N CLAMP PLUG (FOR RG-59/U CABLE)			
PART NO.			
172112			
DWG. NO.	172112.DWG	REV.	NC
SIZE	A	SCALE	NA