

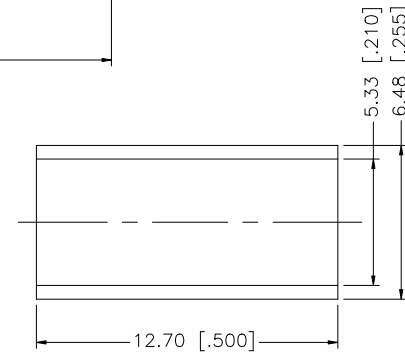
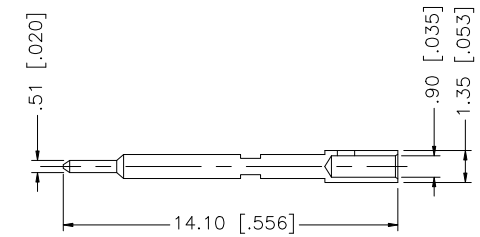
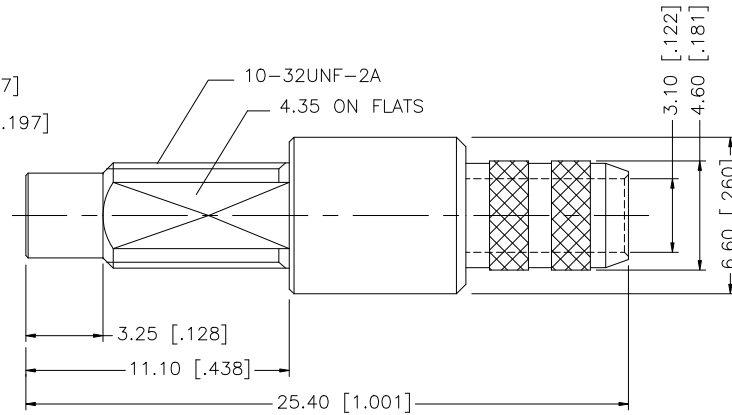


RECOMMENDED MOUNTING HOLE

RECOMMENDED CABLE STRIPPING DIMENSIONS

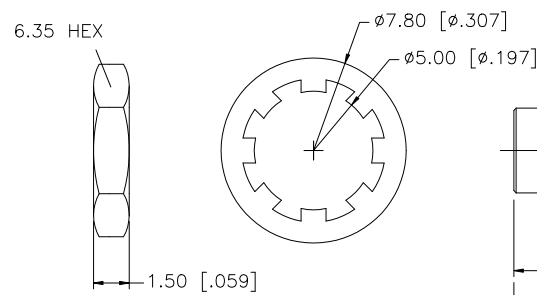

1. CRIMPED FERRULE HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN SQUARE CRIMP SIZE .043"

						UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex						
8							UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”		DRAWN	G.R.S.	04/07/08							
7	HEAT SHRINK						1			CHECKED				PART DESCRIPTION SMC BULKHEAD CRIMP JACK (FOR-58/U, 58B/U)				
6	FERRULE		COPPER		GOLD		1			ISSUED								
5	HEX NUT		BRASS		GOLD		1			SHEET		1 OF 1		PART NO. 152146				
4	LOCK WASHER		BRASS		GOLD		1											
3	CONTACT PIN		BRASS		GOLD		1			CAD FILE				DWG. NO. 152146.DWG REV. A SIZE A SCALE NA				
2	INSULATOR		PTFE		NATURAL		1			C:/152/152146.DWG								
1	BODY		BRASS		GOLD		1	DO NOT SCALE DRAWING										
DESCRIPTION		MATERIAL		FINISH		QTY												