





RECOMMENDED MOUNTING HOLE

REV.	DATE	ECR NO.	DESCRIPTION
NC	04/29/10	XXXXXX	INITIAL RELEASE

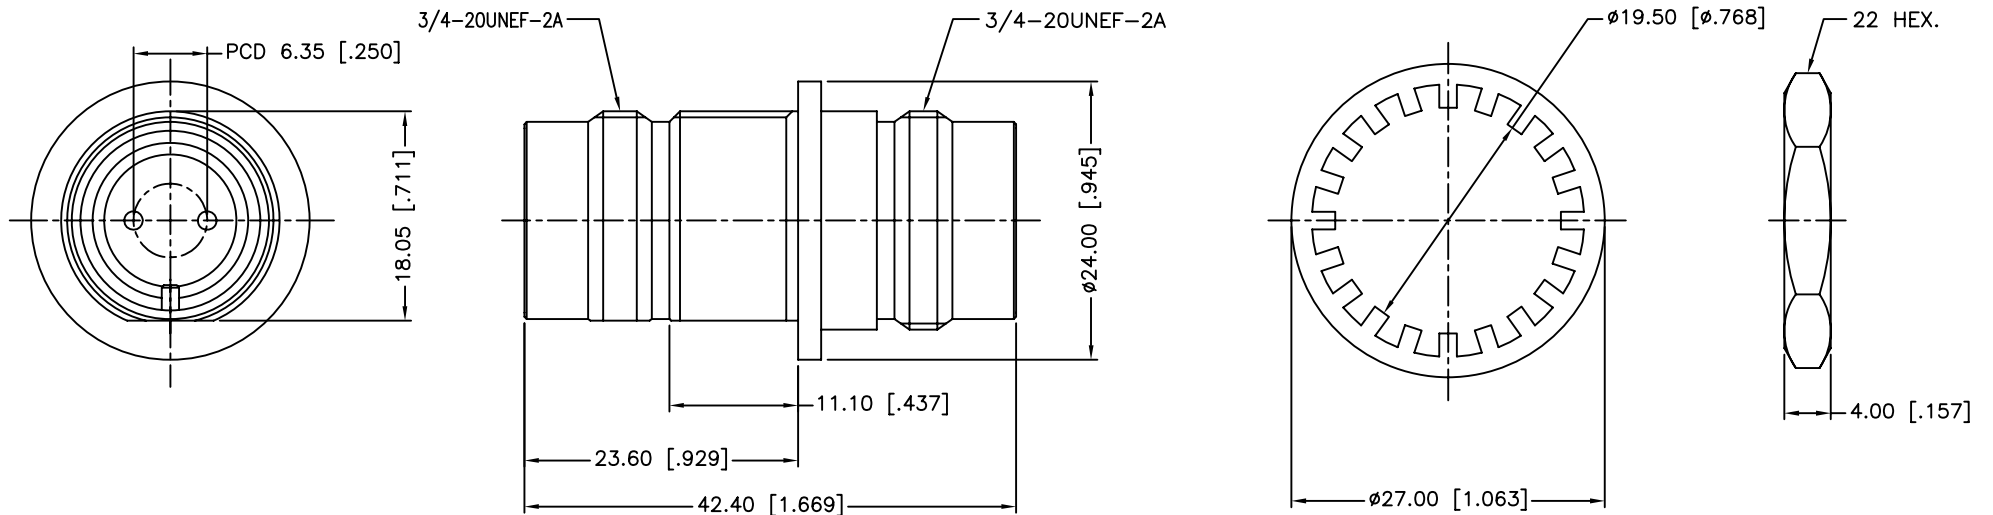

1. FREQUENCY RANGE: DC - 0.2 GHz
2. MAX. PANEL THICKNESS=5mm

8	HEX NUT	BRASS	NICKEL	1
7	LOCK WASHER	BRASS	NICKEL	1
6	PIN	BRASS	NICKEL	1
5	PIN	BRASS	NICKEL	2
4	RING	BRASS	NICKEL	1
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	2
2	INSULATOR	PBT	WHITE	2
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	04/29/10
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/162105.DWG

Amphenol Connex			
PART DESCRIPTION			
TWINAXIAL BULKHEAD JACK-TO-JACK ADAPTOR (FOR 95 OHM)			
PART NO.			
162105			
DWG. NO.	162105.DWG	REV.	NC
SIZE	A	SCALE	NA