


REV.	DATE	DESCRIPTION
NC	07/01/03	INITIAL RELEASE

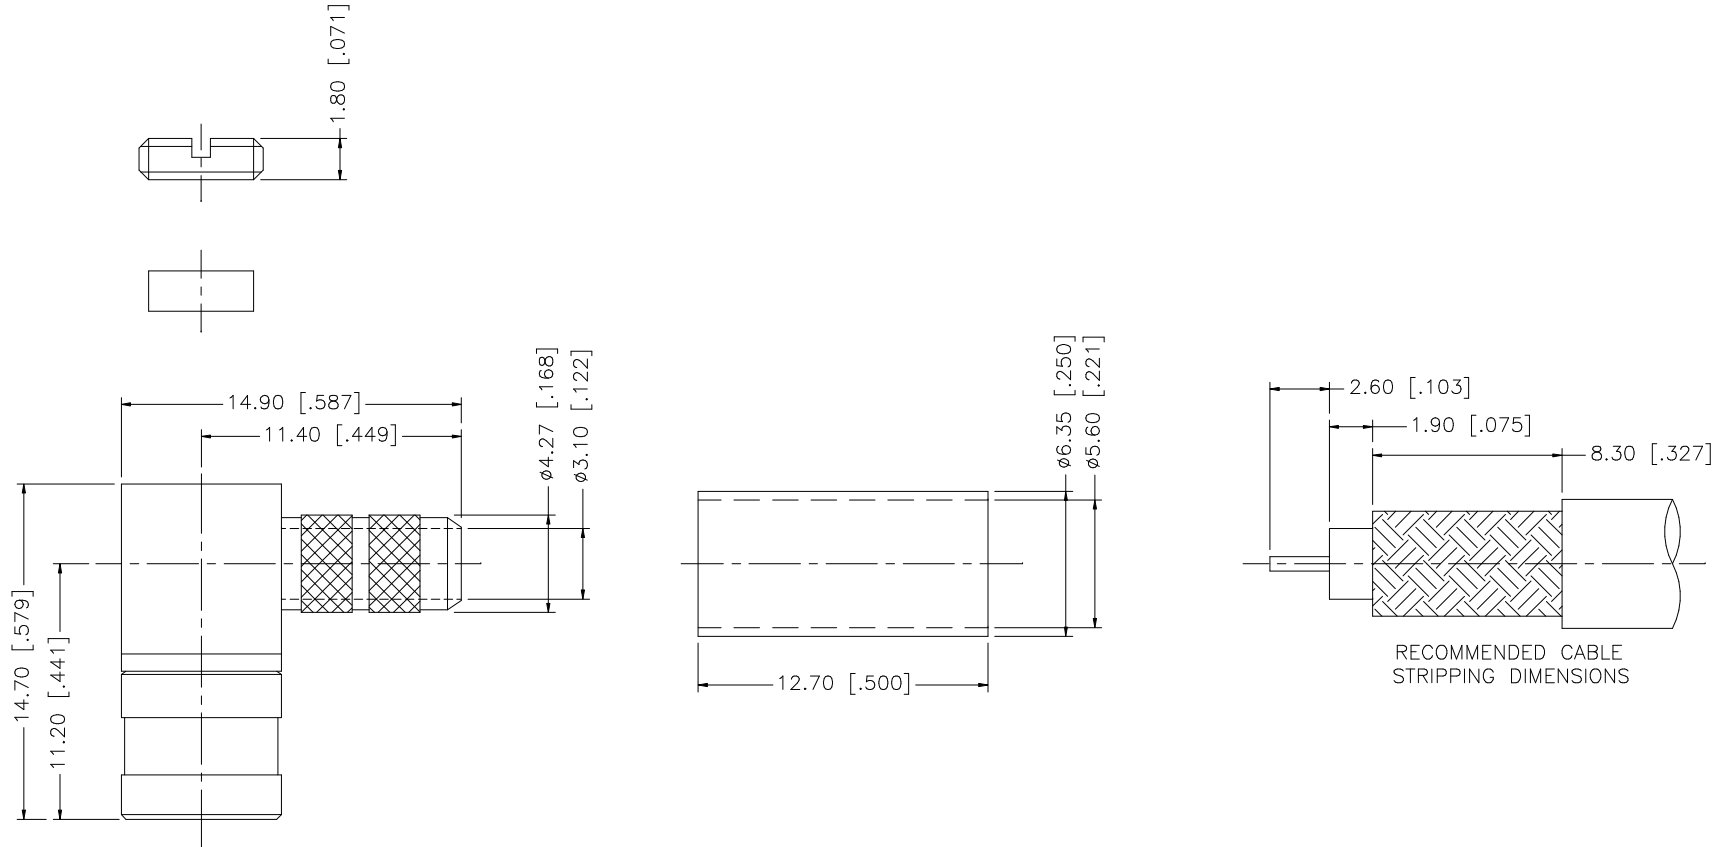

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex			
8						DRAWN	G.R.S.	07/01/03					
7						CHECKED			PART DESCRIPTION SMB R/A CRIMP PLUG (FOR RG-223/U, 55/U, 142A/U, 400/U)				
6						ISSUED							
5	FERRULE	COPPER	GOLD	1		SHEET	1 OF 1		PART NO. 142322				
4	COVER	BRASS	GOLD	1									
3	CONTACT PIN	BER. COPPER	GOLD	1		CAD FILE	C:/142/142322.DWG		DWG. NO. 142322.DWG		REV. NC	SIZE A	SCALE NA
2	INSULATOR	TEFLON	NATURAL	1									
1	BODY	BRASS	GOLD	1									
DESCRIPTION		MATERIAL	FINISH	QTY									