






REV.	DATE	DESCRIPTION
NC	02/23/00	INITIAL RELEASE

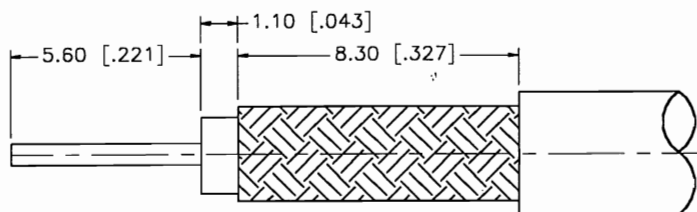

RECOMMENDED
CABLE STRIPPING DIMS

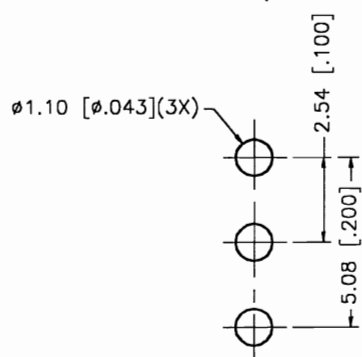

RECOMMENDED
MOUNTING HOLE

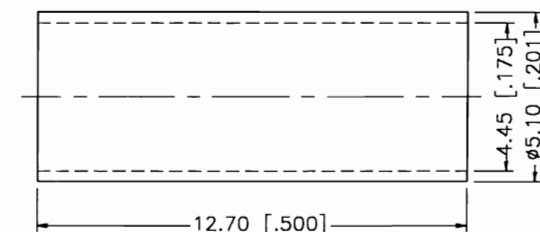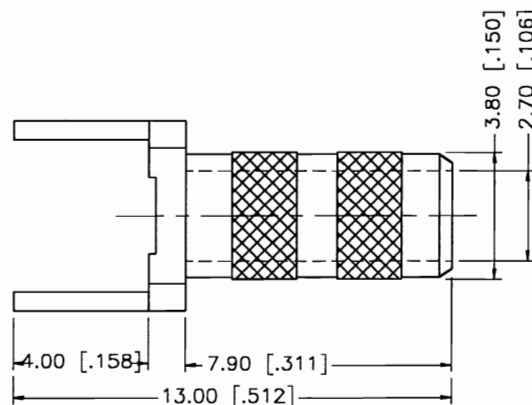

CRIMP NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .178"

	DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS		DATE						
1	BODY	BRASS	GOLD	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN	G.R.S.	02/23/00		TITLE PCB MOUNT CABLE TERMINATION (FOR RG-180B/U, 195/U CABLE)				
2	FERRULE	COPPER	GOLD		CHECKED								
3					ISSUED								
4				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4				SIZE		FSCM NO.	DWG. NO.	REV.	
5								A	99001		142262.DWG		NC
6													
7													
8				DO NOT SCALE DRAWING				SCALE	NA	PART NO.	142262	SHEET	1 OF 1