

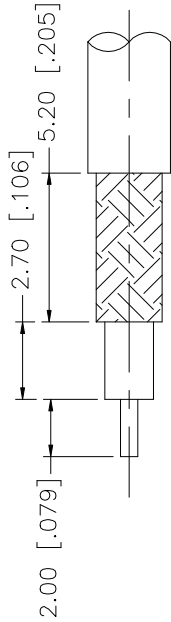
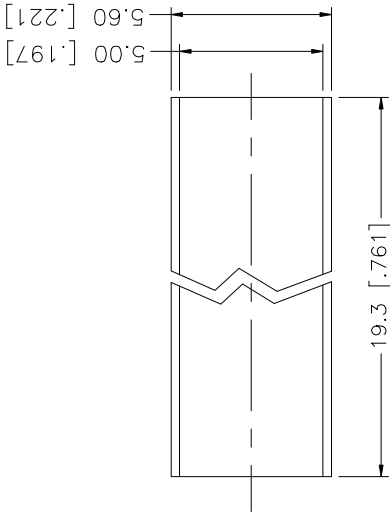



REV.		DATE	DESCRIPTION
A		03/22/06	UPDATE DRAWING FORMAT

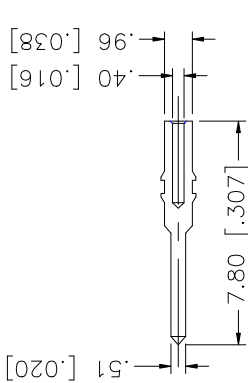

RECOMMENDED
CABLE STRIPPING DIM'S

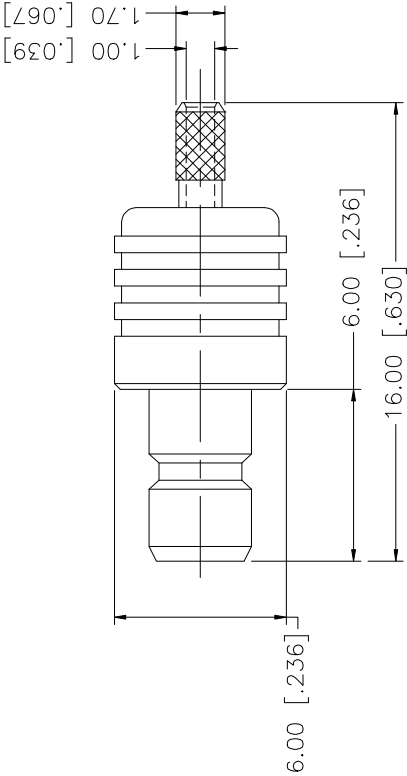

REV.		DATE	DESCRIPTION
A		03/22/06	UPDATE DRAWING FORMAT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE	
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:		DRAWN G.R.S.		03/22/06	
0.5 - 8mm ± 0.20mm		CHECKED			
8 - 30mm ± 0.40mm		ISSUED			
30 - 120mm ± 0.50mm		SHEET 1 OF 1			
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:		CAD FILE C:/142/142185.DWG			
.020 - .315 = ± 0.007"		DO NOT SCALE DRAWING			
.315 - 1.180 = ± 0.015"					
1.180 - 4.724 = ± 0.020"					

DESCRIPTION	MATERIAL	FINISH	QTY
HEAT SHRINK TUBE	COPPER	NICKEL	1
FERRULE	BRASS	GOLD	1
CONTACT PIN	TEFLON	NATURAL	1
INSULATOR	BRASS	NICKEL	1
BODY			

PART NO.		142185	
PART DESCRIPTION		SMB CRIMP JACK - 75ohm (FOR 178/U 196/U CABLE)	
DWG. NO.		142185.DWG	
REV.		A	
SIZE		A	
SCALE		NA	

Amphenol Connex