




REV.	DATE	DESCRIPTION
A	06/05/03	UPDATE DRAWING FORMAT
B	10/09/06	REVISE TO .085" SEMI-RIGID CABLE

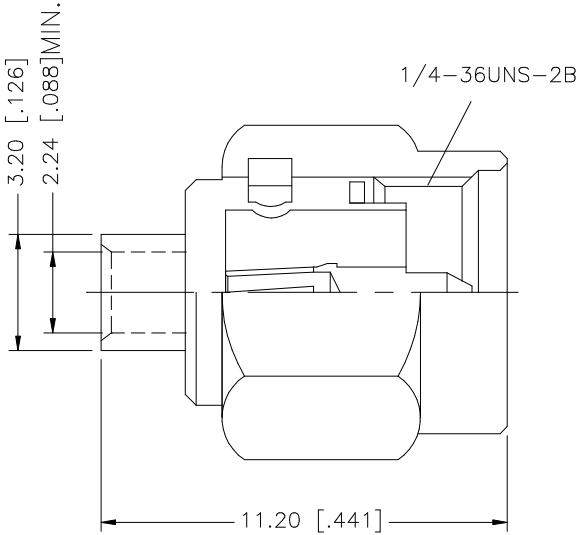

RECOMMENDED CABLE
STRIPPING DIMENSIONS



8				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex									
7					DRAWN	G.R.S.	06/05/03											
6					CHECKED			PART DESCRIPTION SMA DIRECT SOLDER PLUG (FOR .085” SEMI–RIGID CABLE)										
5					ISSUED													
4	INSULATOR	TEFLON	NATURAL		1	SHEET	1 OF 1											
3	CONTACT PIN	BER. COPPER	GOLD		1					PART NO. 132294								
2	INSULATOR	TEFLON	NATURAL		1													
1	BODY	BRASS	GOLD		1	CAD FILE		C:/132/132294.DWG		DWG. NO.		132294.DWG	REV.	A	SIZE	A	SCALE	NA
DESCRIPTION				MATERIAL	FINISH	QTY												