

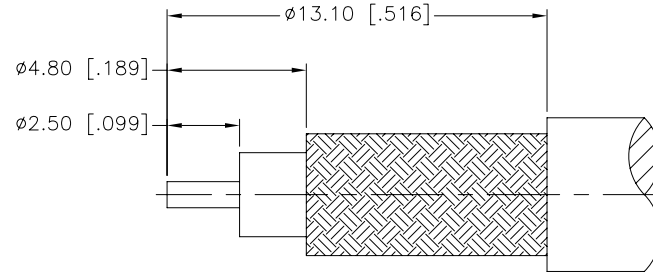
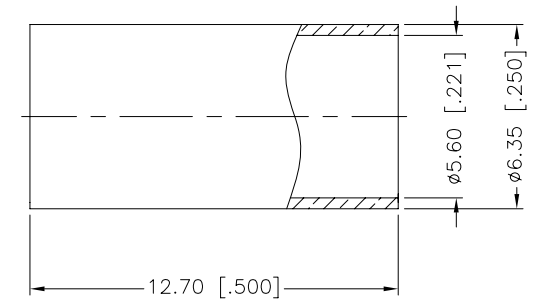


REV.	DATE	ECR NO.	DESCRIPTION
NC	04/13/12	XXXXXX	INITIAL RELEASE

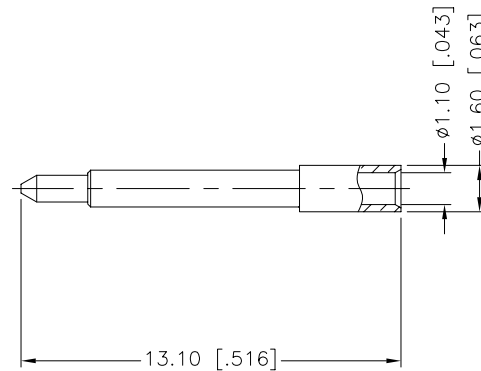

RECOMMENDED
CABLE STRIPPING DIM'S

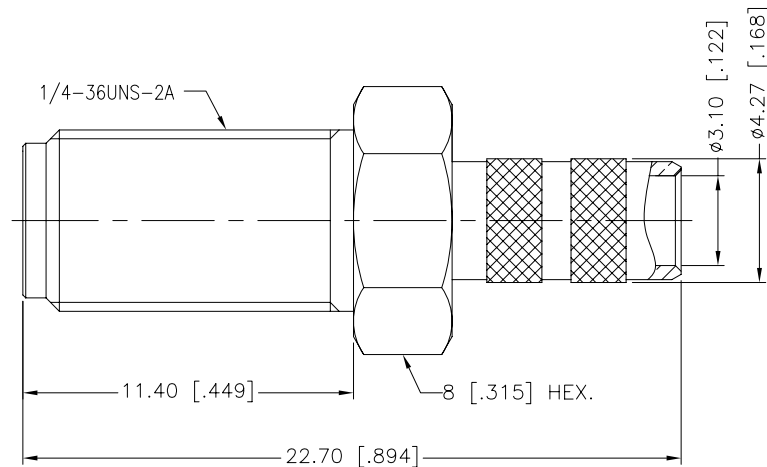

1. CRIMPED FERRULE
HEX. CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX. CRIMP SIZE .052"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex												
						DRAWN	M.ZHANG		04/13/12													
CHECKED																						
4						FERRULE	BRASS		GOLD		1		PART DESCRIPTION									
3						CONTACT PIN	BRASS		GOLD		1		SMA REVERSE POLARITY CRIMP JACK (FOR RG–55/U,142A/U,223/U,400/U CABLE)									
2						INSULATOR	PTFE		NATURAL		1		PART NO.									
1						BODY	BRASS		GOLD		1		132197RP									
DESCRIPTION						MATERIAL		FINISH		QTY		CAD FILE		DWG. NO.			REV.		SIZE		SCALE	
												C:/CONNEX/132197RP.DWG		132197RP.DWG			NC		A		NA	