


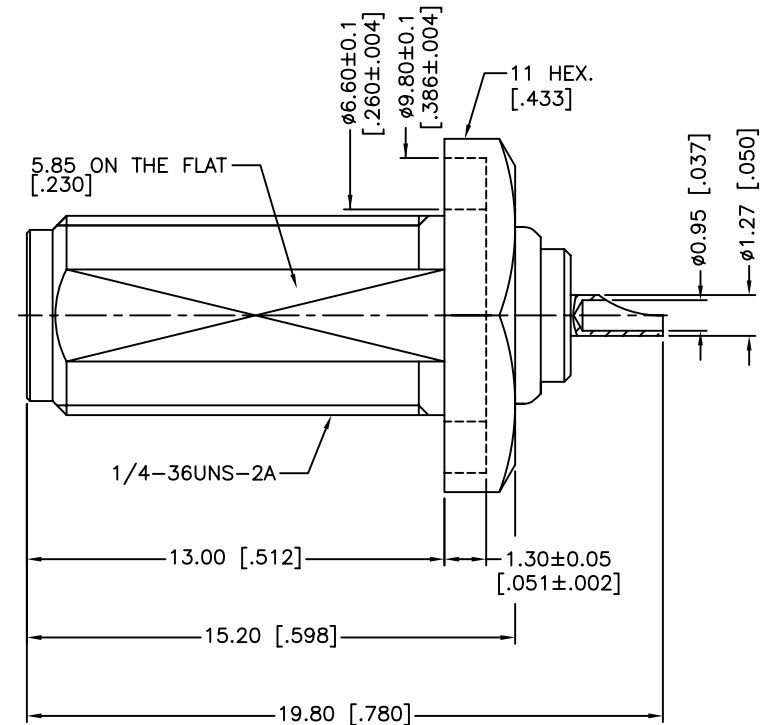
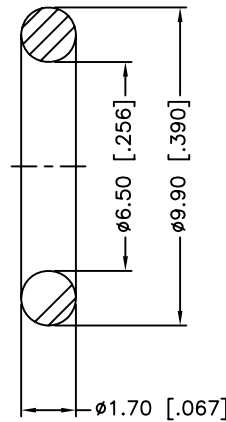


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/12/00	XXXXXX	INITIAL RELEASE
A	11/21/02	XXXXXX	UPDATE FORMAT
B	07/09/13	2491	UPDATE FORMAT, ADD ELECTRICAL/MECHANICAL NOTES

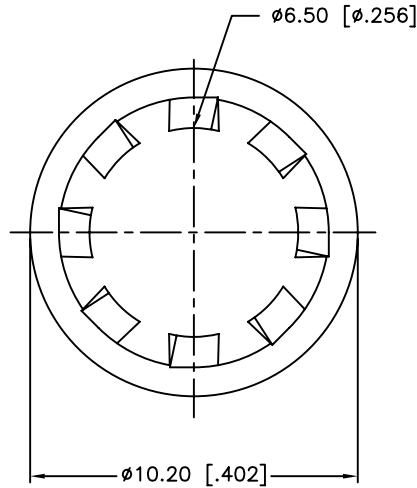

RECOMMENDED
MOUNTING HOLE

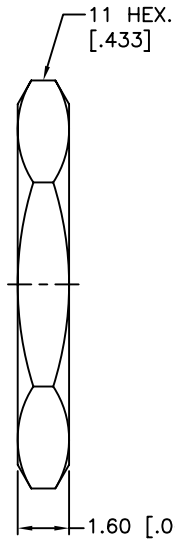

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: 0-18 GHZ
3. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
4. DURABILITY: 500 CYCLES MIN.
5. TEMPERATURE RANGE: -65°C TO +165°C
6. MAX. PANEL THICKNESS= 4.9 mm

6	HEX NUT	BRASS	NICKEL	1
5	LOCK WASHER	BRASS	NICKEL	1
4	GASKET	SILICONE RUBBER	RED	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	NICKEL	1
DESCRIPTION	MATERIAL	FINISH	QTY	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
<0.5 ± 0.05mm
0.5 - 6mm ± 0.10mm
6 - 30mm ± 0.20mm
30 - 120mm ± 0.30mm
ANGLES ± 1°
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
<.020 ± 0.002"
.020 - .236 ± 0.004"
.236 - 1.180 ± 0.007"
1.180 - 4.724 ± 0.012"
ANGLES ± 1°
DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	07/09/13
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/132138-10.DWG	

Amphenol Connex			
PART DESCRIPTION			
SMA BULKHEAD RECEPTACLE JACK EXTENDED BODY			
PART NO. 132138-10			
DWG. NO. 132138-10.DWG	REV. B	SIZE A	SCALE NA