



REV.	DATE	DESCRIPTION
NC	01/24/06	INITIAL RELEASE
A	06/31/06	ADD CRIMP NOTES



RECOMMENDED
CABLE STRIPPING DIM'S

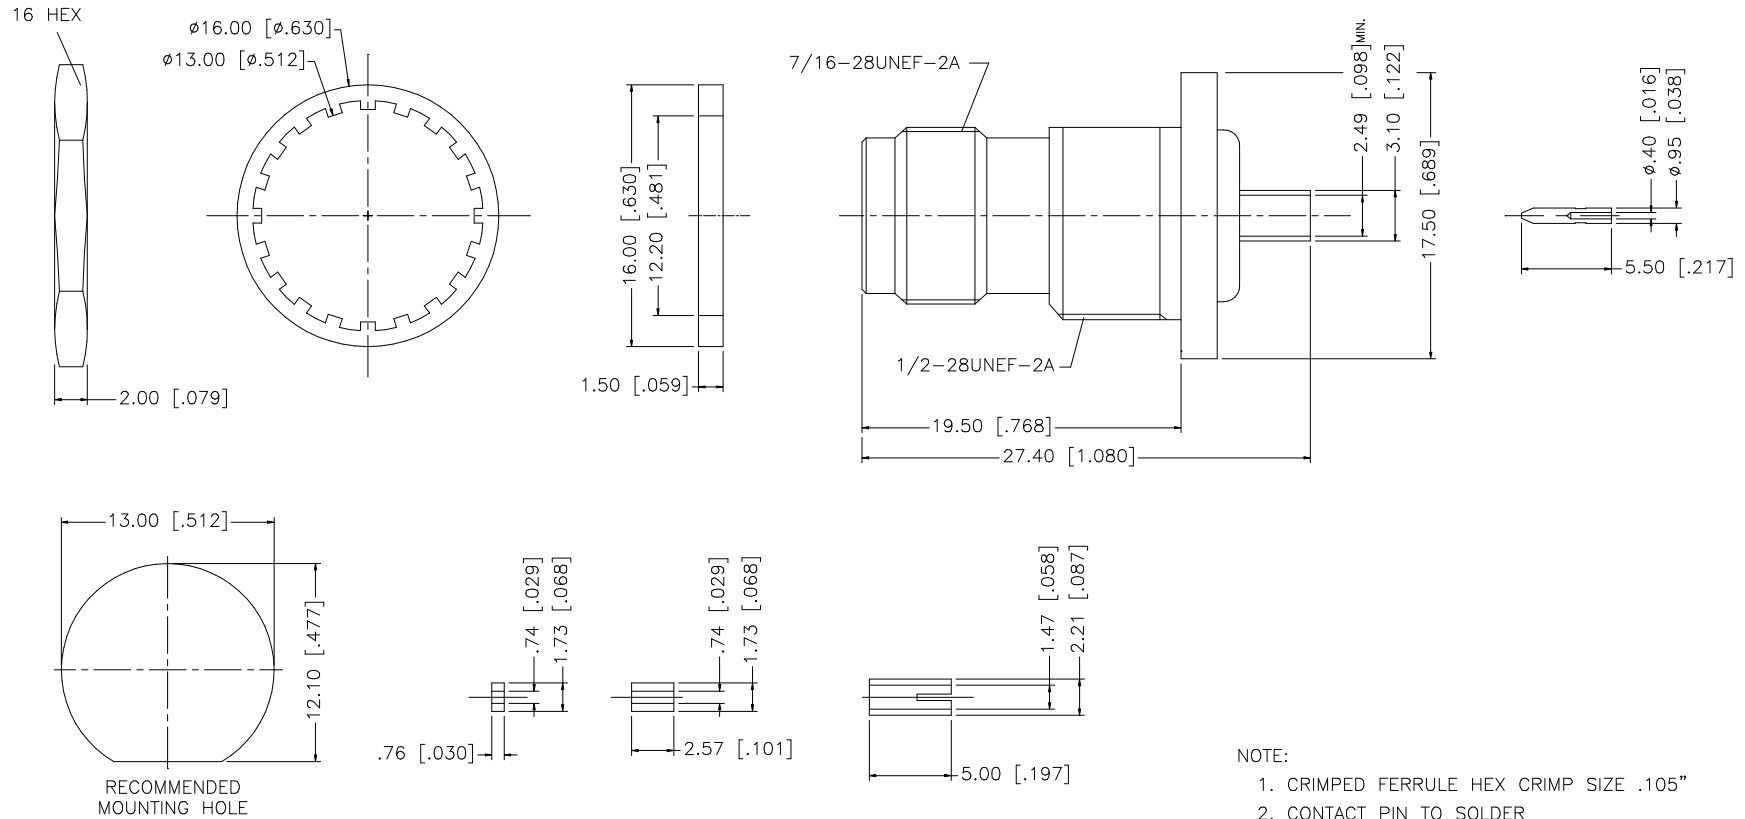

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .105"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex						
8						DRAWN	G.R.S.	06/31/06								
7	FERRULE	COPPER	NICKEL	1		CHECKED										
6	HEX NUT	BRASS	NICKEL	1		ISSUED				PART DESCRIPTION						
5	LOCK WASHER	BRASS	NICKEL	1		SHEET	1 OF 1				TNC REVERSE POLARITY BULKHEAD CRIMP JACK (FOR 1.32mm AMC CABLE)					
4	GASKET	RUBBER	RED	1						PART NO.		122516RP-10				
3	CONTACT PIN	PHOS. BRONZE	GOLD	1								DWG. NO. 122516RP-10.DWG				
2	INSULATOR	TEFLON	NATURAL	1						CAD FILE		C:/122/122516RP-10.DWG	REV. A	SIZE A	SCALE NA	
1	BODY/HOUSING	BRASS	NICKEL	1												
DESCRIPTION MATERIAL FINISH QTY																