




REV.	DATE	ECR NO.	DESCRIPTION
NC	01/14/10	XXXXXX	INITIAL RELEASE



SCALE 2.000

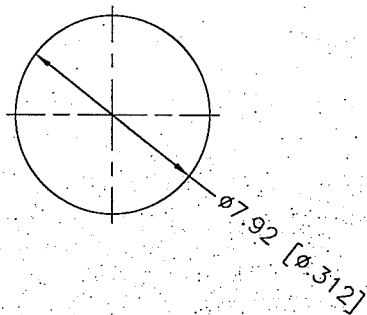

RECOMMENDED
MOUNTING HOLE

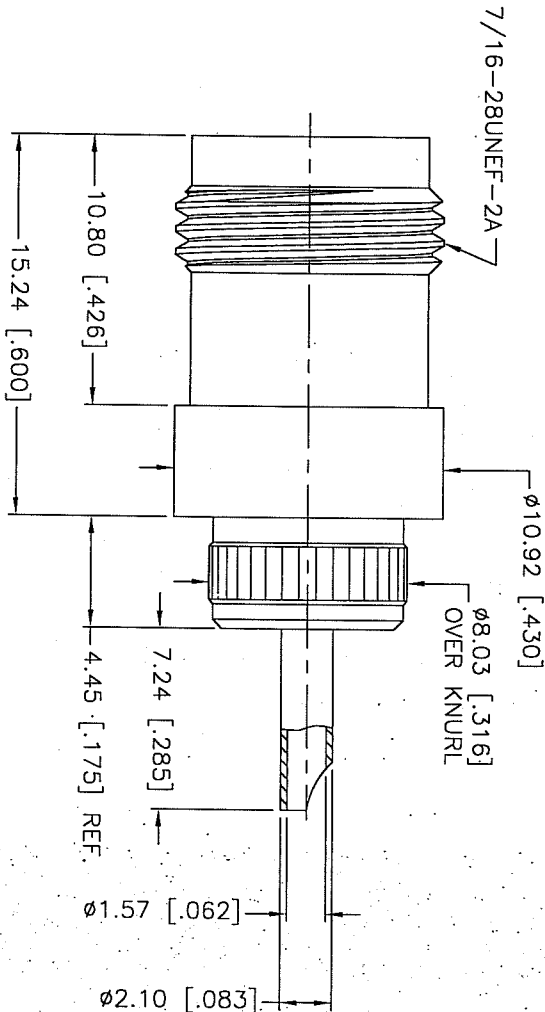

MIN. PANEL THICKNESS = 3.81 MM

Amphenol Connex

TNC BULKHEAD RECEPT. JACK

(50 OHM)

3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	NEXCOTE	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND FOR CONVERSION TO METRIC DIMS. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

APPROVALS	DATE
DRAWN S.H.E	01/14/10
CHECKED	
ISSUED	
SHEET 1 OF 1	

PART DESCRIPTION	PART NO.
TNC BULKHEAD RECEPT. JACK (50 OHM)	122955
DWG. NO. 122955.DWG	REV. INC SIZE A SCALE NA