



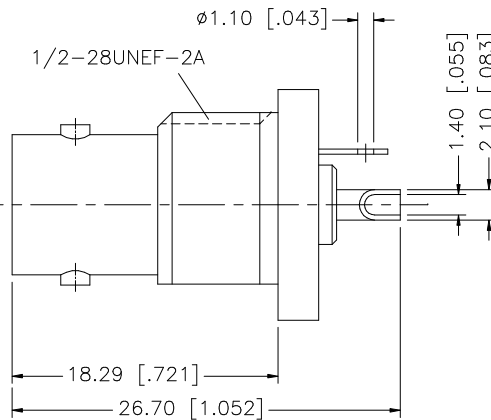



REV.	DATE	DESCRIPTION
NC	04/06/06	INITIAL RELEASE

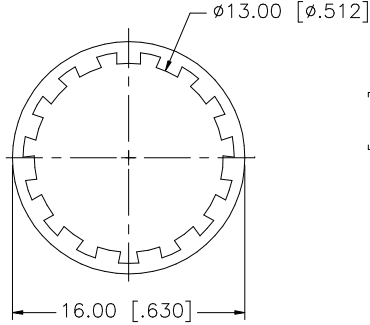

RECOMMENDED
MOUNTING HOLE



NOTE:

1. MAX. PANEL THICKNESS = 2.5mm
2. CONTACT PLATING: GOLD PL. 50MIN THICK
OVER NICKEL PL. 100MIN THICK OVER COPPER STRIKE.

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex					
8					DRAWN	G.R.S.	04/06/06							
7					CHECKED			PART DESCRIPTION BNC BULKHEAD RECEPT. JACK (NON-ISOLATED) 75ohm						
6					ISSUED									
5	HEX NUT	BRASS	NICKEL		1	SHEET	1 OF 1			PART NO. 112731				
4	LOCK WASHER	BRASS	NICKEL		1									
3	CONTACT PIN	PHOS. BRONZE	SEE NOTE 2		1				DWG. NO.112731.DWGREV. NC SIZE A SCALE NA					
2	INSULATOR	TEFLON	NATURAL		1									
1	BODY	BRASS	NICKEL	1	CAD FILE C:/112/112731.DWG									
DESCRIPTION		MATERIAL	FINISH	QTY										