



| REV. | DATE     | DESCRIPTION     |
|------|----------|-----------------|
| NC   | 03/10/06 | INITIAL RELEASE |

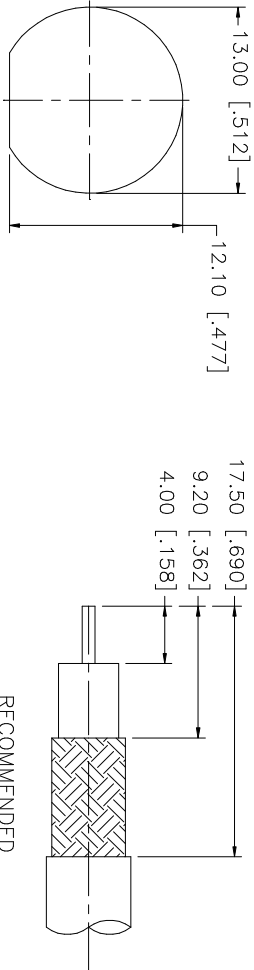

RECOMMENDED  
CABLE STRIPPING DIM'S

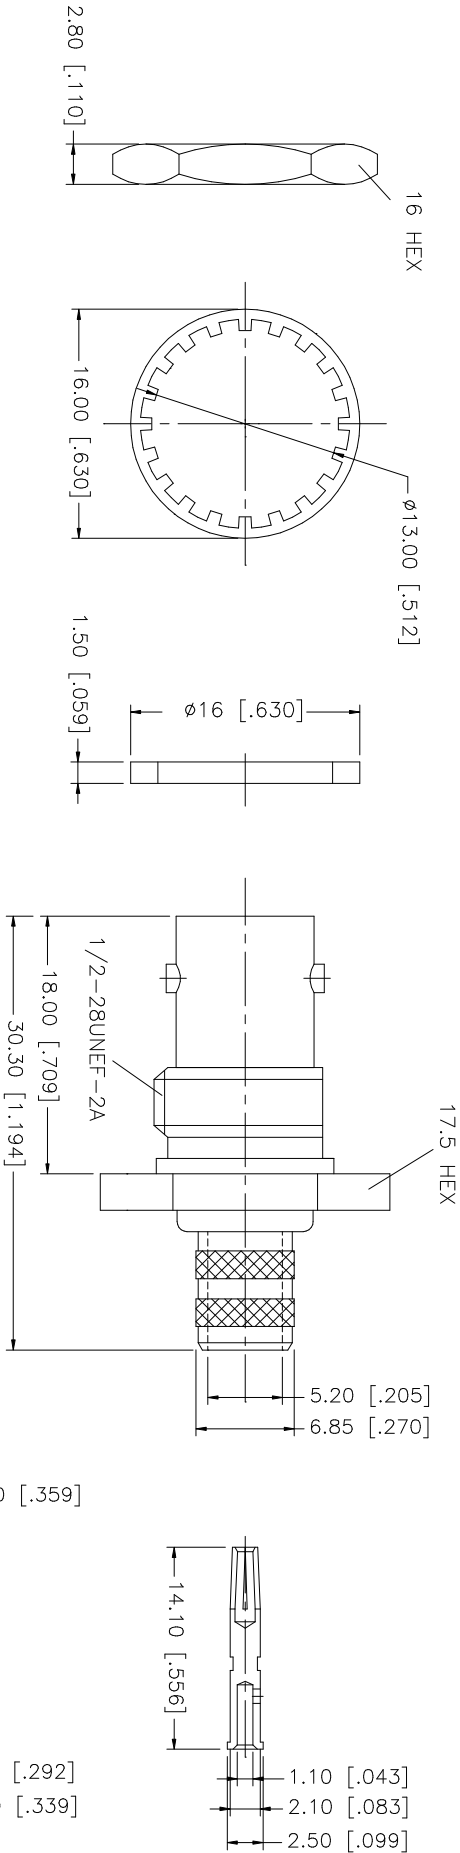

NOTE:  
1. CRIMPED FERRULE HEX CRIMP SIZE: .319"  
2. CRIMPED CONTACT PIN HEX CRIMP SIZE: .068"

|   |             |              |         |     |                                                                                                                                        |           |                   |                            |          |            |      |    |      |   |       |    |
|---|-------------|--------------|---------|-----|----------------------------------------------------------------------------------------------------------------------------------------|-----------|-------------------|----------------------------|----------|------------|------|----|------|---|-------|----|
| 8 |             |              |         |     | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.             | APPROVALS | DATE              | <div>Amphenol Connex</div> |          |            |      |    |      |   |       |    |
| 7 | FERRULE     | COPPER       | NICKEL  | 1   | UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:<br>0.5 – 8mm ± 0.20mm<br>8 – 30mm ± 0.40mm<br>30 – 120mm ± 0.50mm           | DRAWN     | G.R.S.            |                            | 03/10/06 |            |      |    |      |   |       |    |
| 6 | HEX NUT     | BRASS        | NICKEL  | 1   |                                                                                                                                        | CHECKED   |                   |                            |          |            |      |    |      |   |       |    |
| 5 | LOCK WASHER | BRASS        | NICKEL  | 1   |                                                                                                                                        | ISSUED    |                   |                            |          |            |      |    |      |   |       |    |
| 4 | GASKET      | SILICONE     | RED     | 1   | UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:<br>.020 – .315 = ± 0.007”<br>.315 – 1.180 = ± 0.015”<br>1.180 – 4.724 = ± 0.020” | SHEET     | 1 OF 1            |                            |          |            |      |    |      |   |       |    |
| 3 | CONTACT PIN | PHOS. BRONZE | GOLD    | 1   |                                                                                                                                        |           |                   |                            |          |            |      |    |      |   |       |    |
| 2 | INSULATOR   | TEFLON       | NATURAL | 1   |                                                                                                                                        |           |                   |                            |          |            |      |    |      |   |       |    |
| 1 | BODY        | BRASS        | NICKEL  | 1   |                                                                                                                                        |           |                   |                            |          |            |      |    |      |   |       |    |
|   | DESCRIPTION | MATERIAL     | FINISH  | QTY | DO NOT SCALE DRAWING                                                                                                                   | CAD FILE  | C:/112/112662.DWG |                            | DWG. NO. | 112662.DWG | REV. | NC | SIZE | A | SCALE | NA |
|   |             |              |         |     |                                                                                                                                        |           |                   |                            |          |            |      |    |      |   |       |    |

Amphenol Connex