



REV.	DATE	DESCRIPTION
NC	05/24/05	INITIAL RELEASE
A	04/09/07	UPDATE DRAWING FORMAT



RECOMMENDED
CABLE STRIPPING DIM'S

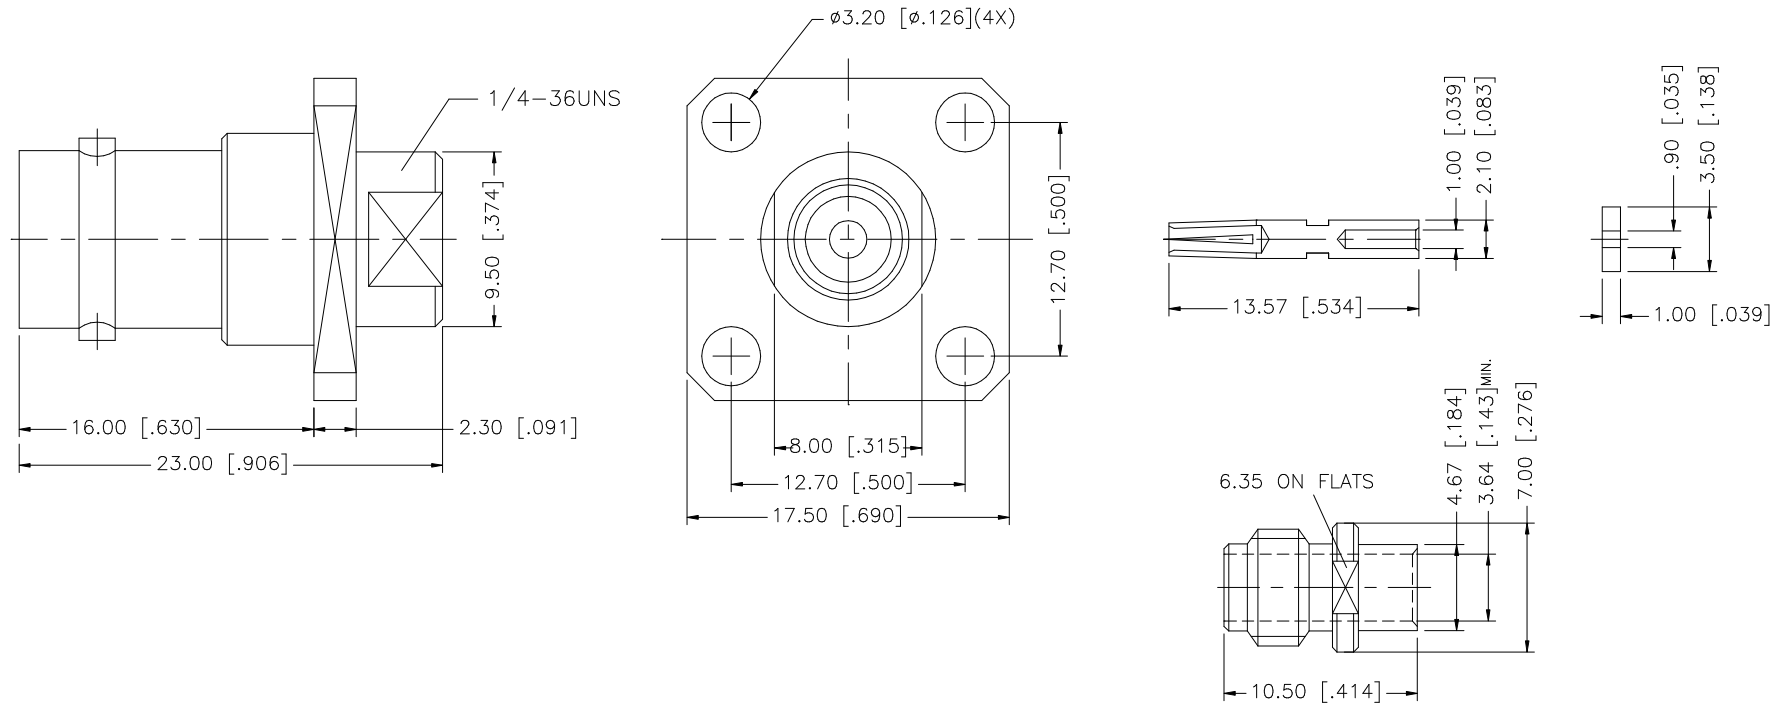

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS		DATE		Amphenol Connex							
8						DRAWN	G.R.S.	04/09/07									
7						CHECKED											
6						ISSUED				PART DESCRIPTION							
5										BNC PANEL DIRECT SOLDER JACK (FOR .141” SEMI RIGID CABLE)							
4	SOLDER NUT	BRASS	GOLD	1			1 OF 1				PART NO.						
3	CONTACT PIN	PHOS. BRONZE	GOLD	1							112619						
2	INSULATOR	TEFLON	NATURAL	1							DWG. NO.						
1	BODY	BRASS	NICKEL	1							112619.DWG						
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING		C:/112/112619.DWG					REV.	A	SIZE	A	SCALE	NA