





REV.	DATE	ECR NO.	DESCRIPTION
A	10/25/99	—	MODIFY CONNECTOR OPENING
B	05/24/00	—	MODIFY PLATING SPEC ON BODY/ ADD ISULATOR
C	09/21/08	—	UPDATE DRAWING FORMAT

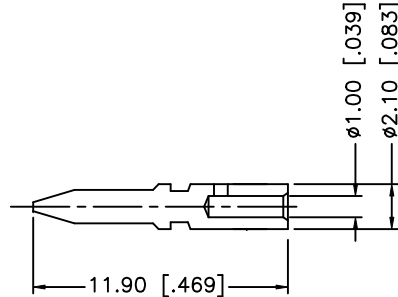

RECOMMENDED CABLE
STRIPPING DIMENSIONS

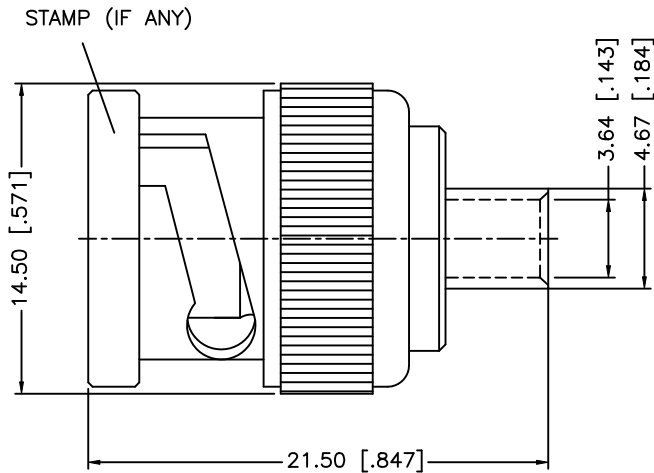

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex					
7						DRAWN	GRS	09/21/08							
6						CHECKED									
5	INSULATOR	PTFE	NATURAL	1		UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	ISSUED				PART DESCRIPTION BNC DIRECT SOLDER PLUG (FOR .141" SEMI RIGID CABLE)				
4	CONTACT PIN	BRASS	GOLD	1			SHEET		1 OF 1						
3	INSULATOR	PTFE	NATURAL	1	CAD FILE		C:/112/112520.DWG		PART NO. 112520						
2	BODY	BRASS	GOLD	1	DWG. NO.		112520.DWG							REV. C	
1	COUPLING NUT	BRASS	NICKEL	1	DO NOT SCALE DRAWING										
	DESCRIPTION	MATERIAL	FINISH	QTY											