







NOTE:

- 1. CRIMPED FERRULE HEX CRIMP SIZE .178"
- 2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068"

112132-12		REVISIONS			
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ.	A	RELEASE TO MFG.	16-May-11	--	RAK

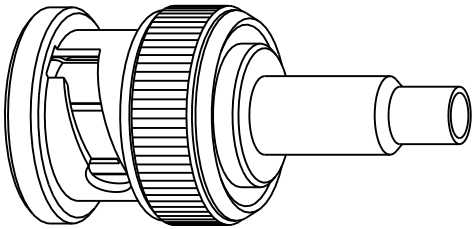

SCALE 2.000

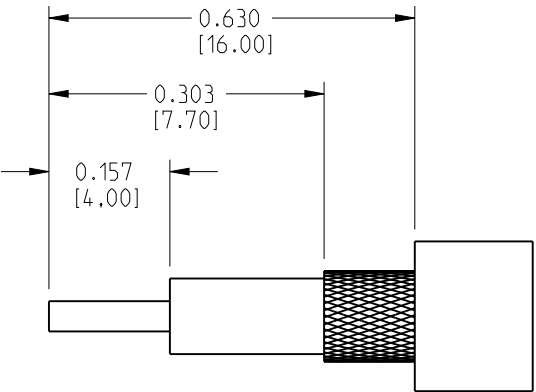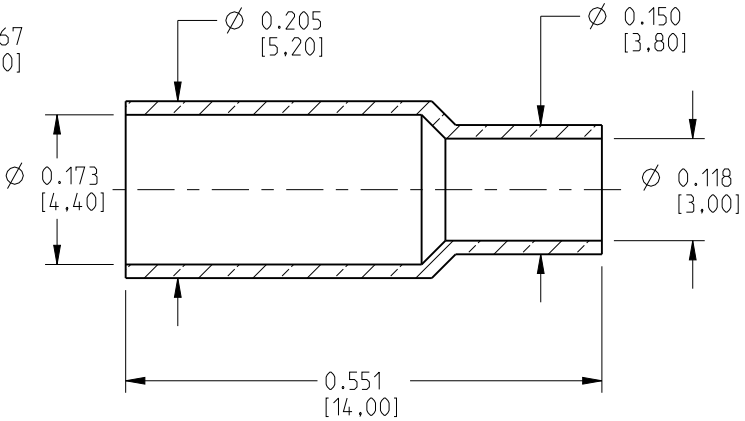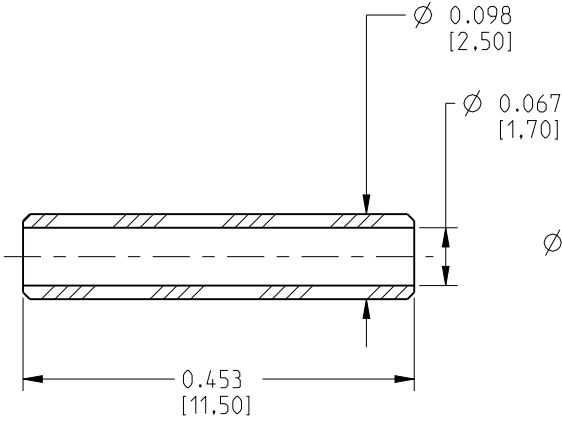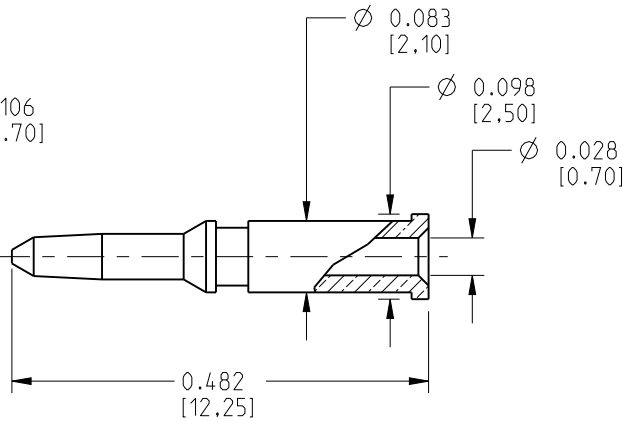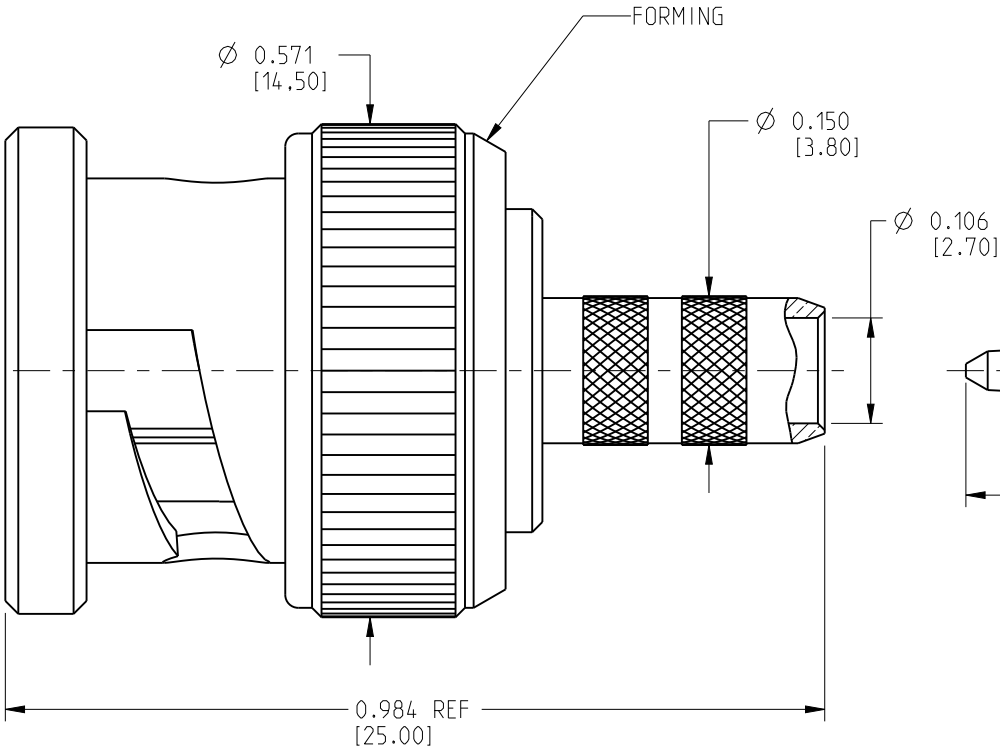

RECOMMENDED CABLE STRIPPING
DIMENSIONS

10	FERRULE	BRASS	NICKEL	1
9	SLEEVE	DELIN	NATURAL	1
8	CONTACT PIN	BRASS	GOLD	1
7	WASHER	BRASS	NICKEL	1
6	SRING	SK5	NICKEL	1
5	RETAINING RING	BRASS	NICKEL	1
4	GASKET	RUBBER	RED	1
3	INSULATOR	DELIN	NATURAL	1
2	BODY	BRASS	NICKEL	1
1	SHELL	ZINC DIECAST	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ±.015 (0,381 mm) ±.005 (0,127 mm) ANGLES ± 1°	MATERIAL SEE BOM TABLE	DRAWN ABHAYA KISHORE	DATE 16-May-11	TITLE BNC CRIMP PLUG FOR (RG-174/U, 188/U,316/U CABLE)		Amphenol Connex	
		ENGINEER ABHAYA KISHORE	DATE 16-May-11				
	REFERENCE TASK- 627	APPROVED	DATE	SCALE: 4.5:1		SHEET 1 OF 1	
		CAD FILE Root Folder/Connector/112132-12			DWG SIZE B	DRAWING NO. 112132-12	REV A