

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. MATERIALS AND FINISHES:

BODY - BRASS, NICKEL-PLATING
CONTACT - BRASS, GOLD PLATING
INSULATOR - DELRIN

2. ELECTRICAL:

A. IMPEDANCE: 75 OHM
B. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.

3. MECHANICAL:


A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO +165° C

4. MAX. PANEL THICKNESS=5.5mm



THIRD ANGLE PROJ. 

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	02-Aug-07	46699	SX

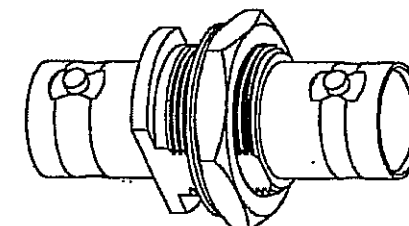

SCALE 2.000

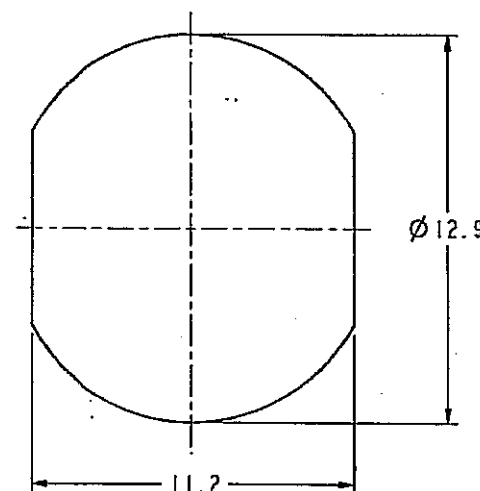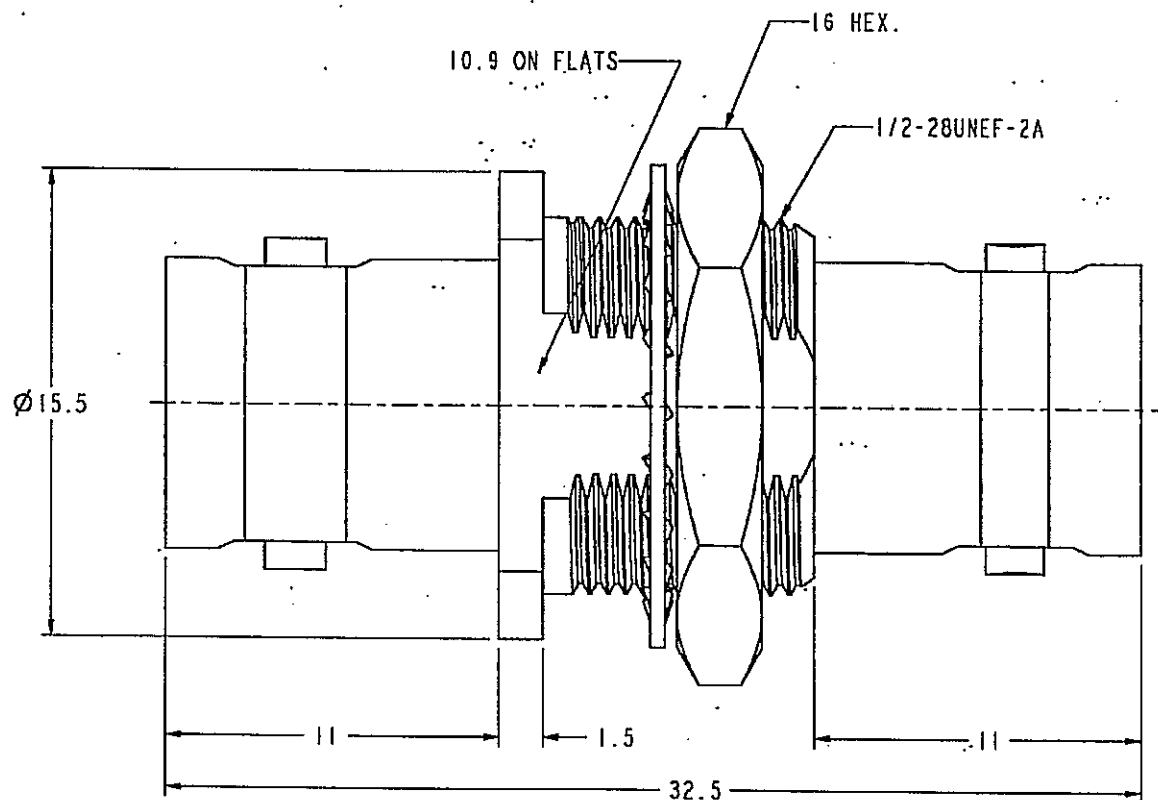

RECOMMENDED
MOUNTING HOLE

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE METRIC AND TOLERANCES ARE: 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ± 1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL		DRAWN S.XIE	DATE 02-Aug-07	TITLE BNC 75 OHM DOUBLE FLAT FEMALE TO FEMALE BULKHEAD ADAPTOR	Amphenol RF Danbury CT USA, Taichung, Taiwan, Shenzhen, China www.amphenolrf.com		
	REFERENCE		ENGINEER <i>ESM</i>	DATE 02-Aug-07				
FINISH			APPROVED <i>ESM</i>	DATE 2-Aug-07	SCALE: 5.0:1.0	SHEET 2 OF 2	DRAWING NO. B7471B1-005-ND3G-75	
			CAD FILE I:\BNC\B7471B1-005-ND3G-75		DWG SIZE B	CODE ID 74868	REV A	PART NO. 31-220N-75DD