

5

4

3

2

1

NOTES:

1. MATERIALS AND FINISHES:
SMA RA PLUG - BRASS, GOLD PLATING

AMC RA PLUG:
HOUSING - PBT, BLACK
CONTACT & GROUND CONTACT - PHOSPHOR BRONZE, GOLD PLATING

CABLE - 1.13 MM CABLE


2. ELECTRICAL:
A. IMPEDANCE: 50 OHM

3. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 95-902-575-XXX AND DATE CODE"


REVISIONS

REV	DESCRIPTION	DATE	ECN	BY
A	RELEASE TO MFG.	03-MAR-22	16152	KR

SCALE 0.600

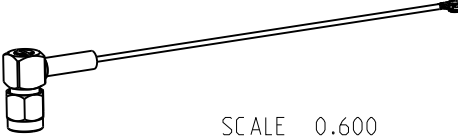

LENGTH 'L' (SEE TABLE)

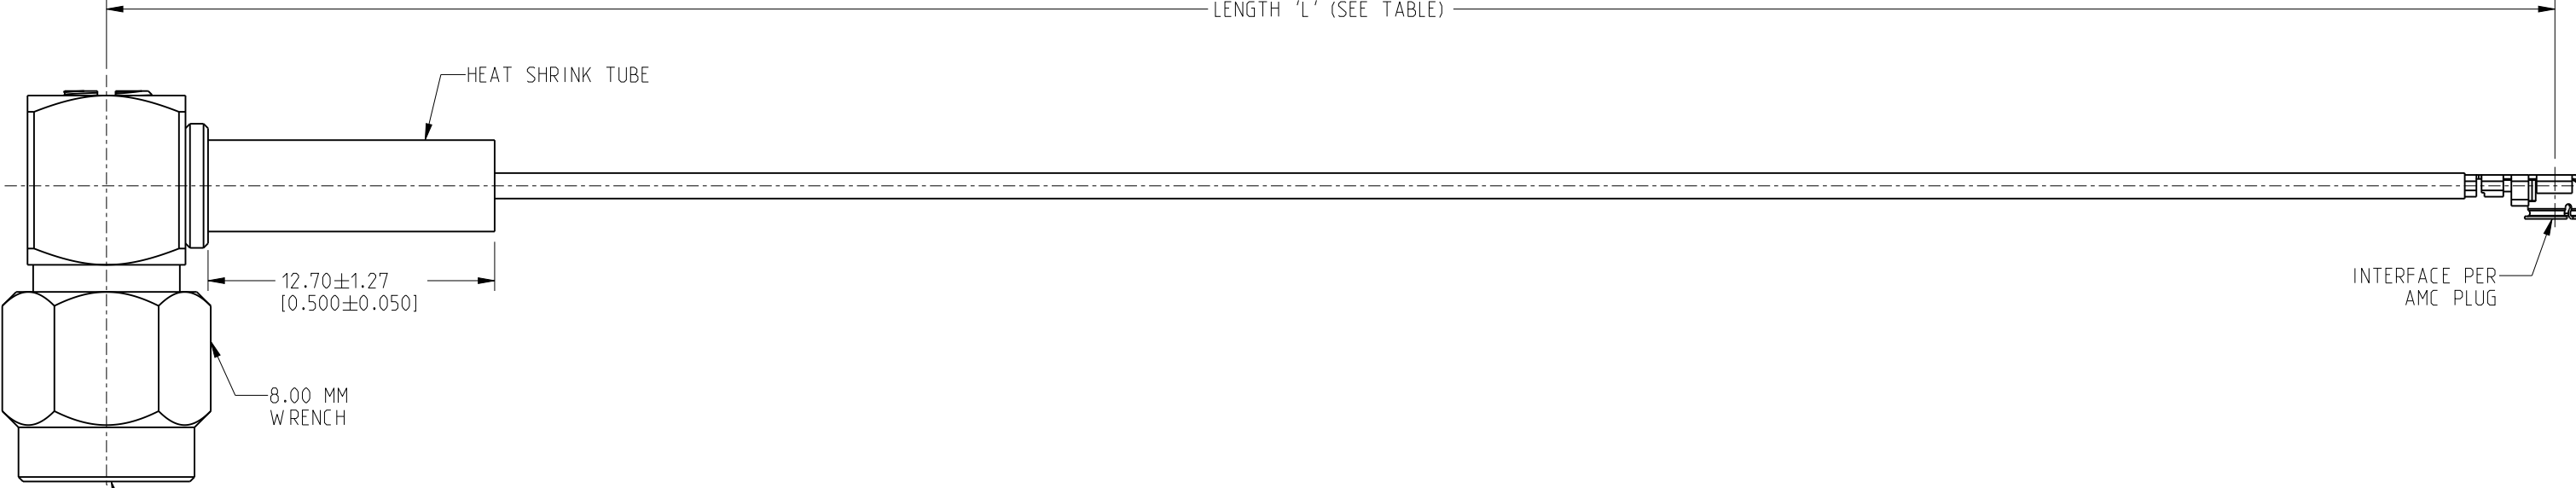

LENGTH TABLE	
PART NUMBER (IMPERIAL)	LENGTH 'L' AND TOLERANCE IN MM (INCHES)
95-902-575-050	50.00 ± 3.81 [1.969 ± 0.150]
95-902-575-100	100.00 ± 3.81 [3.937 ± 0.150]
95-902-575-150	150.00 ± 3.81 [5.906 ± 0.150]
95-902-575-200	200.00 ± 5.08 [7.874 ± 0.200]
95-902-575-250	250.00 ± 5.08 [9.843 ± 0.200]
95-902-575-300	300.00 ± 5.08 [11.811 ± 0.200]

DESIGN REQUIREMENTS:

☒ FREQUENCY: DC - 9 GHz

☒ CONTINUITY


☐ VSWR: ____ MAX.

☒ HI-POT: 200 VRMS

☐ INS. LOSS: ____ dB MAX.

☐ OTHER:

THIRD ANGLE PROJ.



REFERENCE

EAR# 11157

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE METRIC [INCHES] AND TOLERANCES ARE:
<0.5mm = ±0.05mm [$<0.020 = \pm 0.002$]
0.5 - 6mm = ±0.1mm [$0.020 - 0.236 = \pm 0.004$]
>6.00 - 30mm = ±0.2mm [$0.236 - 1.181 = \pm 0.008$]
>30.00 - 120mm = ±0.3mm [$>1.181 - 4.725 = \pm 0.012$]

ANGLES = ±1°

MATERIAL

SEE NOTES

ENGR.1 KARTHIK

ENGR.2

DATE 08-FEB-22

TITLE

SMA RA PLUG TO
AMC RA PLUG
USING 1.13 MM CABLE
VARIOUS LENGTH

SHEET NO. 2 OF 2

SCALE: 3.5:1.0

Amphenol RF

SIZE B

DRAWING NO. 95-902-575-XXX

ITEM NO. 95-902-575-XXX

PART NO. 95-902-575-XXX

REV A

5

4

3

2

1

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY