

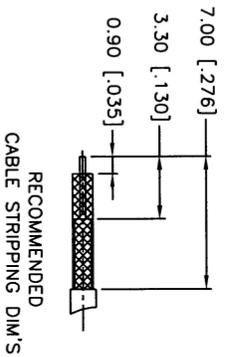
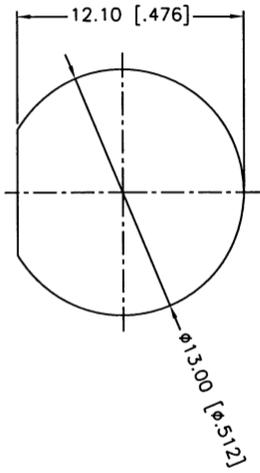


REV.	DATE	ECR NO.	DESCRIPTION
NC	01/07/10	-	INITIAL RELEASE

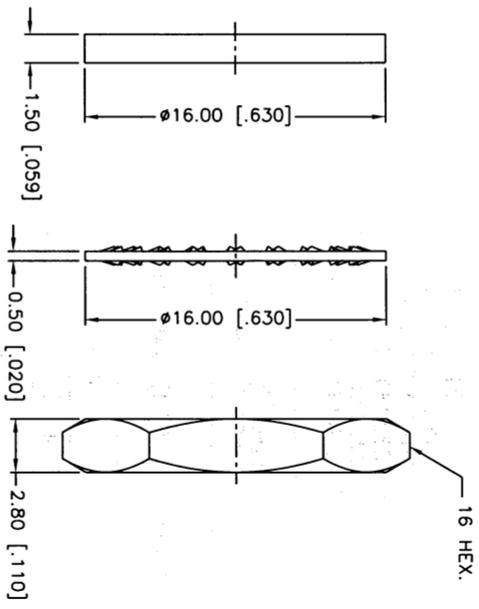

RECOMMENDED MOUNTING HOLE

RECOMMENDED CABLE STRIPPING DIM'S

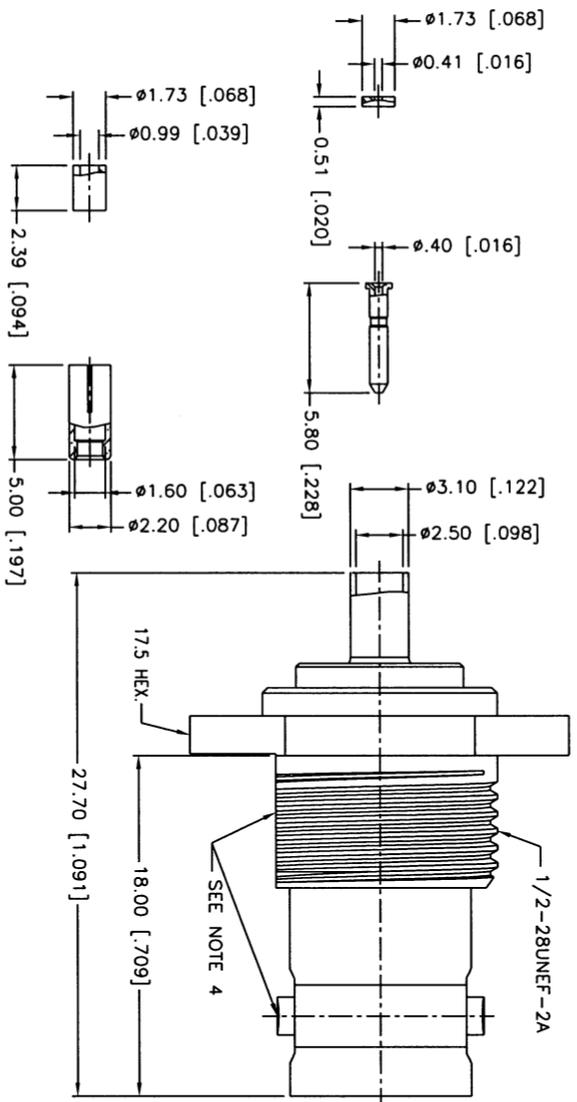

- NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .105"
  2. SOLDER CENTER CONTACT
  3. MAX. PANEL THICKNESS=3.2MM
  4. FLAT TO BE LOCKED 90°±5° INRELATION TO Ø1.98 STUDS AS SHOWN

QTY	FINISH	MATERIAL	DESCRIPTION
1	NICKEL	BRASS	FERRULE
1	NICKEL	BRASS	SLEEVE
1	NATURAL	PTFE	INSULATOR
1	GOLD	BRASS	CONTACT PIN
1	NICKEL	BRASS	HEX NUT
1	NICKEL	BRASS	LOCK WASHER
1	RED	RUBBER	GASKET
1	NICKEL	BRASS	BARREL
1	NICKEL	BRASS	BODY
1	GOLD	PHOSPHOR BRONZE	CONTACT PIN
1	NATURAL	PTFE	INSULATOR
1	NICKEL	BRASS	HOUSING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 ± 0.007" .315 - 1.180 ± 0.015" 1.180 - 4.724 ± 0.020" DO NOT SCALE DRAWING

APPROVALS	DATE
M.ZHANG	01/07/10

**Amphenol Connex**

PART DESCRIPTION  
**BNC BULKHEAD CRIMP JACK(FOR 1.37mm CABLE)**

PART NO. 112756

DWG. NO. 112756.DWG

REV. NC

SIZE A

SCALE NA