
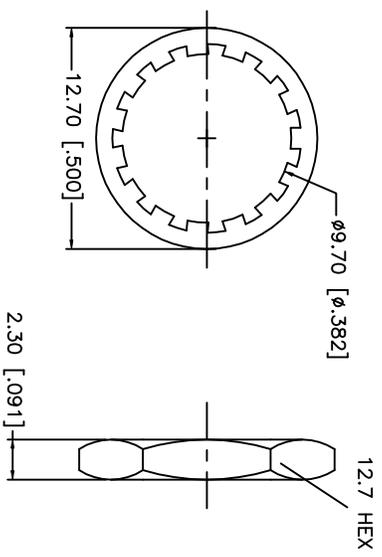
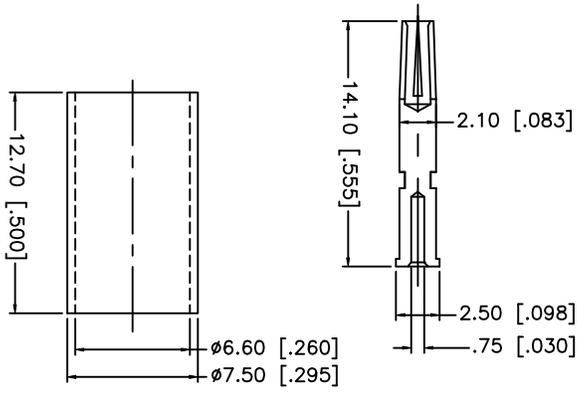
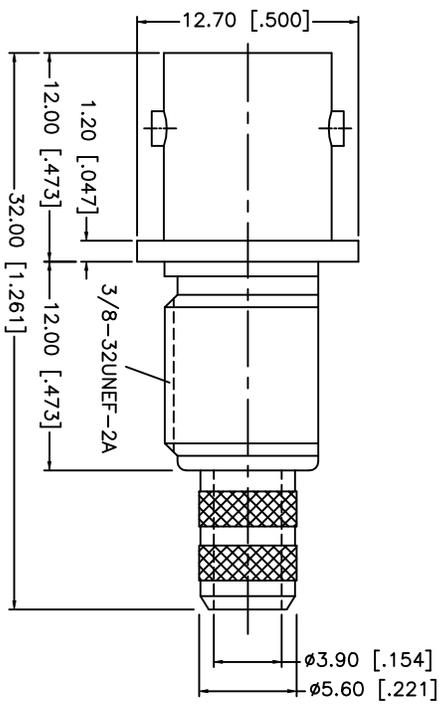


REV.	DATE	DESCRIPTION
NC	09/08/02	INITIAL RELEASE

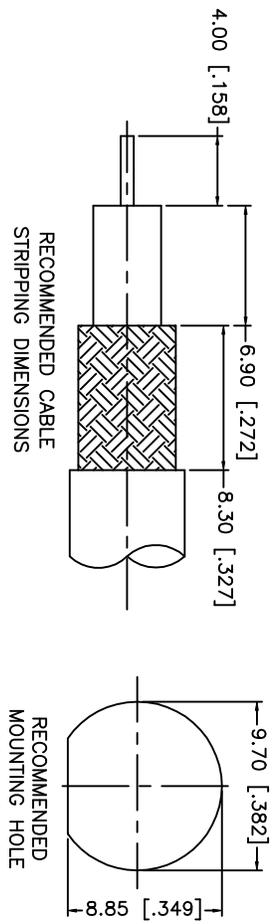

- NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
 2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"
 3. MAX PANEL THICKNESS = 6.5mm

8			UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE	TITLE			
7			DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN	09/08/02	Amphenol - Connex CONNECTOR CORPORATION BNC BULKHEAD CRIMP JACK (front mount) (FOR RG59/U CABLE)			
6	FERRULE	COPPER		CHECKED					
5	HEX NUT	BRASS		ISSUED					
4	LOCK WASHER	BRASS				SIZE	FSCM NO.	DWG. NO.	REV.
3	CONTACT PIN	PHOS. BRONZE				A	99001	112711.DWG	B
2	INSULATOR	TEFLON				SCALE	PART NO.	SHEET	
1	BODY	BRASS				NA	112711	1 OF 1	
	DESCRIPTION	MATERIAL	FINISH	DO NOT SCALE DRAWING					