

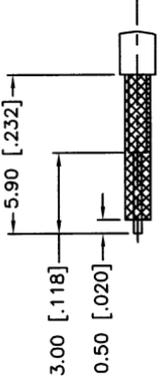
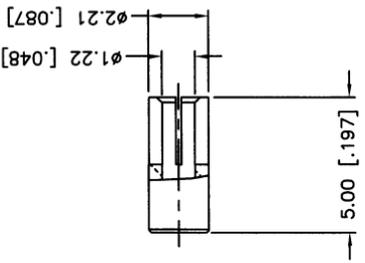
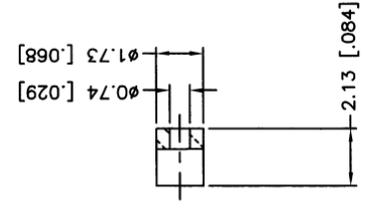


REV.	DATE	ECR NO.	DESCRIPTION
NC	01/15/10	XXXXXX	INITIAL RELEASE

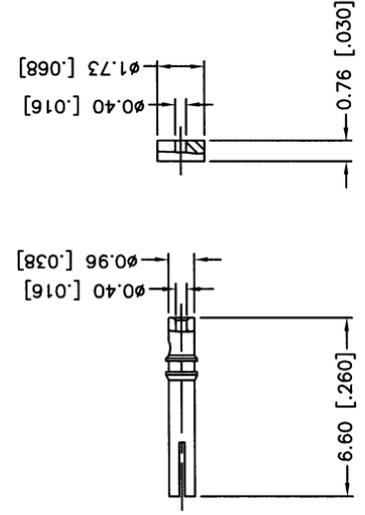

RECOMMENDED  
CABLE STRIPPING DIM'S

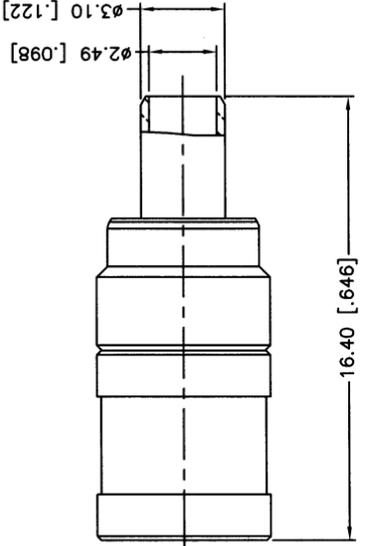

1. CRIMPED FERRULE  
HEX CRIMP SIZE .105"
2. CONTACT PIN TO SOLDER

10		INNER FERRULE	BRASS	GOLD	1
9		SLEEVE	BRASS	GOLD	1
8		INSULATOR	PTEE	NATURAL	1
7		CONTACT PIN	BER. COPPER	GOLD	1
6		BARREL	BRASS	GOLD	1
5		BODY	BRASS	GOLD	1
4		INSULATOR	PTEE	NATURAL	1
3		INSULATOR	PTEE	NATURAL	1
2		SHELL	BRASS	GOLD	1
1		RETAINER RING	BER. COPPER	NATURAL	1
		DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN ( ) ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	
TOLERANCES FOR MILLIMETERS ARE:	
0.5 - 8mm	± 0.20mm
8 - 30mm	± 0.40mm
30 - 120mm	± 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	
.020 - .315	± 0.007"
.315 - 1.180	± 0.015"
1.180 - 4.724	± 0.020"

APPROVALS	DATE
DRAWN M.ZHANG	01/15/10
CHECKED	
ISSUED	
SHEET 1 OF 1	

GWG FILE	C:/CONNEX/142342.DWG
DWG. NO.	142342.DWG
REV.	NC
SIZE	A
SCALE	NA

# Amphenol Connex

SMB CRIMP PLUG  
(FOR 1.13 CABLE)

142342

NA