
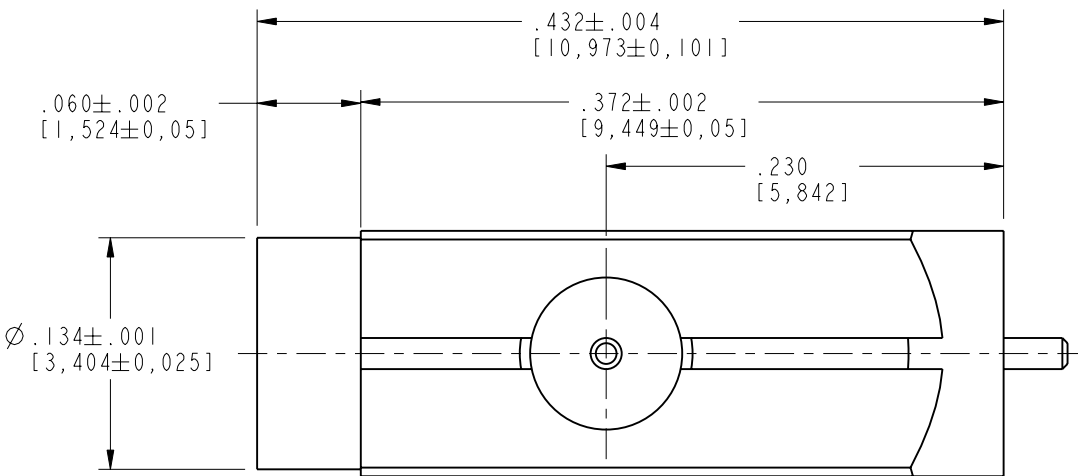
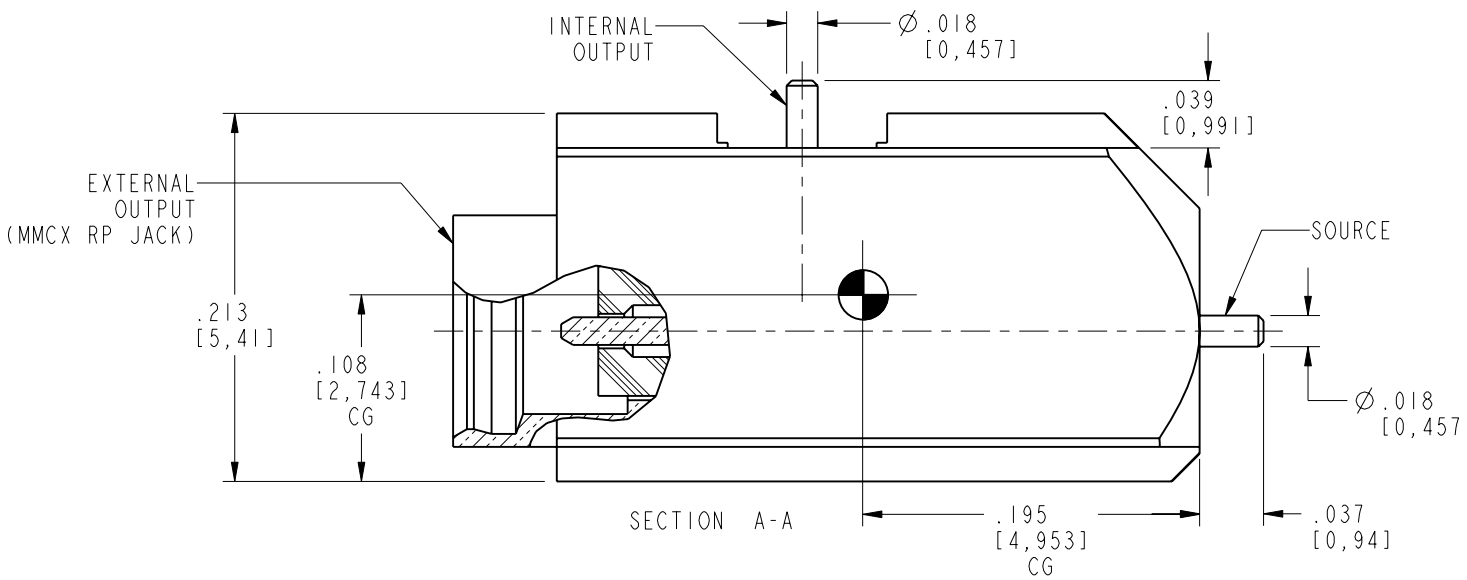
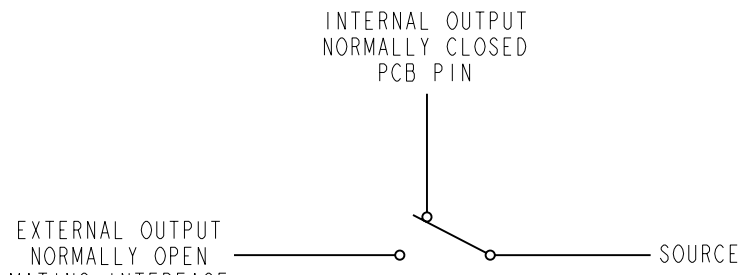


NOTES: 1. MATERIALS AND FINISHES: BODY - BRASS, GOLD PLATING (.000010 MIN THICK) FEMALE CONTACT - BERYLLIUM COPPER, GOLD PLATING (.000030 MIN THICK) PIN CONTACT - PHOSPHOR BRONZE, GOLD PLATING (.000030 MIN THICK) OUTER CONTACT - PHOSPHOR BRONZE, NICKEL PLATING (.000100 THICK) INSULATORS - PTFE AND PEEK 2. ELECTRICAL: A. IMPEDANCE: 50 OHM B. FREQUENCY RANGE: DC - 3 GHz C. VSWR(RETURN LOSS): 1.4 (15.56 dB), MAX. D. DIELECTRIC WITHSTANDING VOLTAGE: 250 VRMS, MIN. 3. MECHANICAL: A. DURABILITY: 5000 CYCLES MIN. B. TEMPERATURE RANGE: -40° C TO 110° C C. INSERTION AND WITHDRAWEL FORCES (PER CECC22000): INSERTION FORCE: LESS THAN OR EQUAL TO 3.4 LBS WITHDRAWEL FORCE: 1.4 LBS TO 3.4 LBS 4. PACKAGING: A. TAPE AND REEL (SEE SHEET 3 FOR DIMENSIONED DRAWING) B. Ø330 MM REEL OR ENGINEERING APPROVED EQUIVALENT C. QUANTITY: 1200 PCS PER REEL D. MARKING: REEL TO BE MARKED "AMPHENOL, 908-221111-LRP, AND DATE CODE" 5. CONNECTOR SUITABLE FOR LEAD-FREE SOLDER REFLOW PER 349-50712 6. THE MMCX INTERFACE MUST NOT BE MATED BEFORE SOLDERING TO BOARD 7. SEE SHEET 3 FOR PCB LAYOUT AND POCKET TAPE DIMENSIONS	908-22111-LRP		REVISIONS						
	DRAWING NO.		REV	DESCRIPTION		DATE	ECO	APPR	
	THIRD ANGLE PROJ.		A	RELEASE TO MFG.		12/13/04	45315	MAH	
			B	SEE SHEET 1		1/21/05	45351	MAH	
		C	1200 PCS PER REEL WAS 500		3/21/05	45380	MAH		
									
		SCALE 3.000							
									
									
		SECTION A-A							
									
		SINGLE POLE DOUBLE THROW SWITCH							
		CUSTOMER OUTLINE DRAWING ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY							
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1°		MATERIAL		DRAWN M. HOYACK		DATE 07-Dec-04			
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.		REFERENCE		ENGINEER M. HOYACK		DATE 22-Sep-04			
		EAR#1536 615X-2106-100		APPROVED B. GLEISSNER		DATE 12/13/04			
		CAD FILE I:\MMCX\908-22111-LRP		CODE ID 74868		DWG SIZE B		DRAWING NO. 908-22111-LRP	
						SCALE: 9.0:1		SHEET 2 OF 3	
								REV A	

NOTES:
1. SEE SHEET 2 FOR SWITCH INFO AND DRAWING
2. PACKAGING:
A. TAPE AND REEL (SEE SHEET 3 FOR DIMENSIONED DRAWING)
B. Ø330 MM REEL OR ENGINEERING APPROVED EQUIVALENT
C. QUANTITY: 1200 PCS PER REEL
D. MARKING: REEL TO BE MARKED
"AMPHENOL, 908-22111-LRP, AND DATE CODE"
3. CONNECTOR SUITABLE FOR LEAD-FREE SOLDER
REFLOW PER 349-50712
4. THE MMCX INTERFACE MUST NOT BE MATED
BEFORE SOLDERING TO BOARD

908-22111-LRP

DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ.	A	RELEASE TO MFG.	12/13/04	45315	MAH
	B	SEE SHEET 1	1/21/05	45351	MAH
	C	1200 PCS PER REEL WAS 500	3/21/05	45380	MAH

USER DIRECTION OF FEED

POCKET TAPE
(LEFT HAND CONFIGURATION)

SCALE 3.000

RECOMMENDED PCB LAYOUT
LEFT HAND CONFIGURATION
(COPLANAR WAVEGUIDE)
SCALE 4.000

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL	DRAWN	DATE	TITLE		Amphenol RF Danbury, CT, USA Tainan, Taiwan Shenzhen, China www.amphenolrf.com				
		M. HOYACK	07-Dec-04							
		ENGINEER	DATE							
		M. HOYACK	06-Dec-04							
	REFERENCE	APPROVED	DATE	MMCX RP JACK PCB SWITCH LEFT HAND PCB CONFIG		SCALE: 8.0:1 SHEET 3 OF 3				
		B. GLEISSNER	12/13/04							
		CAD FILE								
		I:\MMCX\908-22111-LRP		CODE ID	DWG SIZE	DRAWING NO.	REV			
				74868	B	908-22111-LRP	C			