

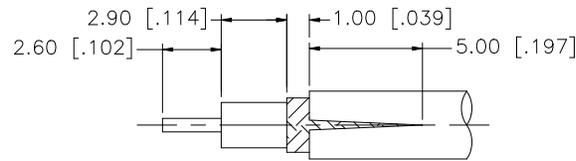






REV.	DATE	ECR NO.	DESCRIPTION
NC	11/25/08	-	INITIAL RELEASE

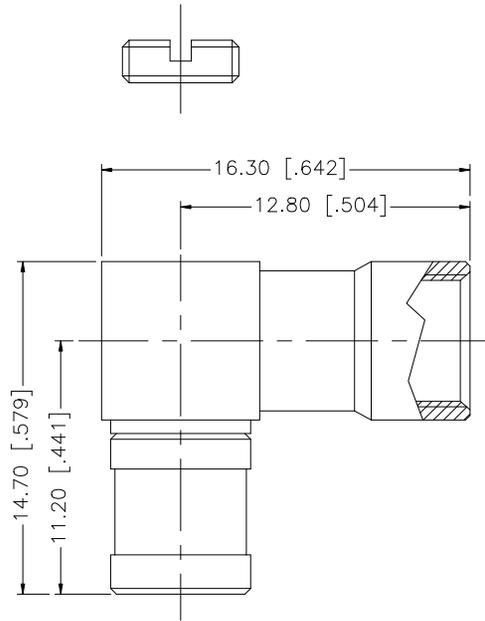

RECOMMENDED CABLE STRIPPING DIMS.



9	NUT	BRASS	NICKEL	1
8	HEX NUT	BRASS	NICKEL	1
7	GASKET	SILICONE	RED	1
6	WASHER	BRASS	NICKEL	2
5	TOP HAT	BRASS	NICKEL	1
4	CONTACT PIN	BER. COPPER	GOLD	1
3	INSULATOR	PTFE	NATURAL	1
2	HOUSING	BRASS	NICKEL	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN GRS	11/25/08
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/142/142130.DWG

Amphenol Connex

PART DESCRIPTION

SMB R/A CLAMP PLUG
(FOR 174/U, 188/U, 316/U CABLE)

PART NO.

142130

DWG. NO.

142130.DWG

REV. NC

SIZE A

SCALE NA