
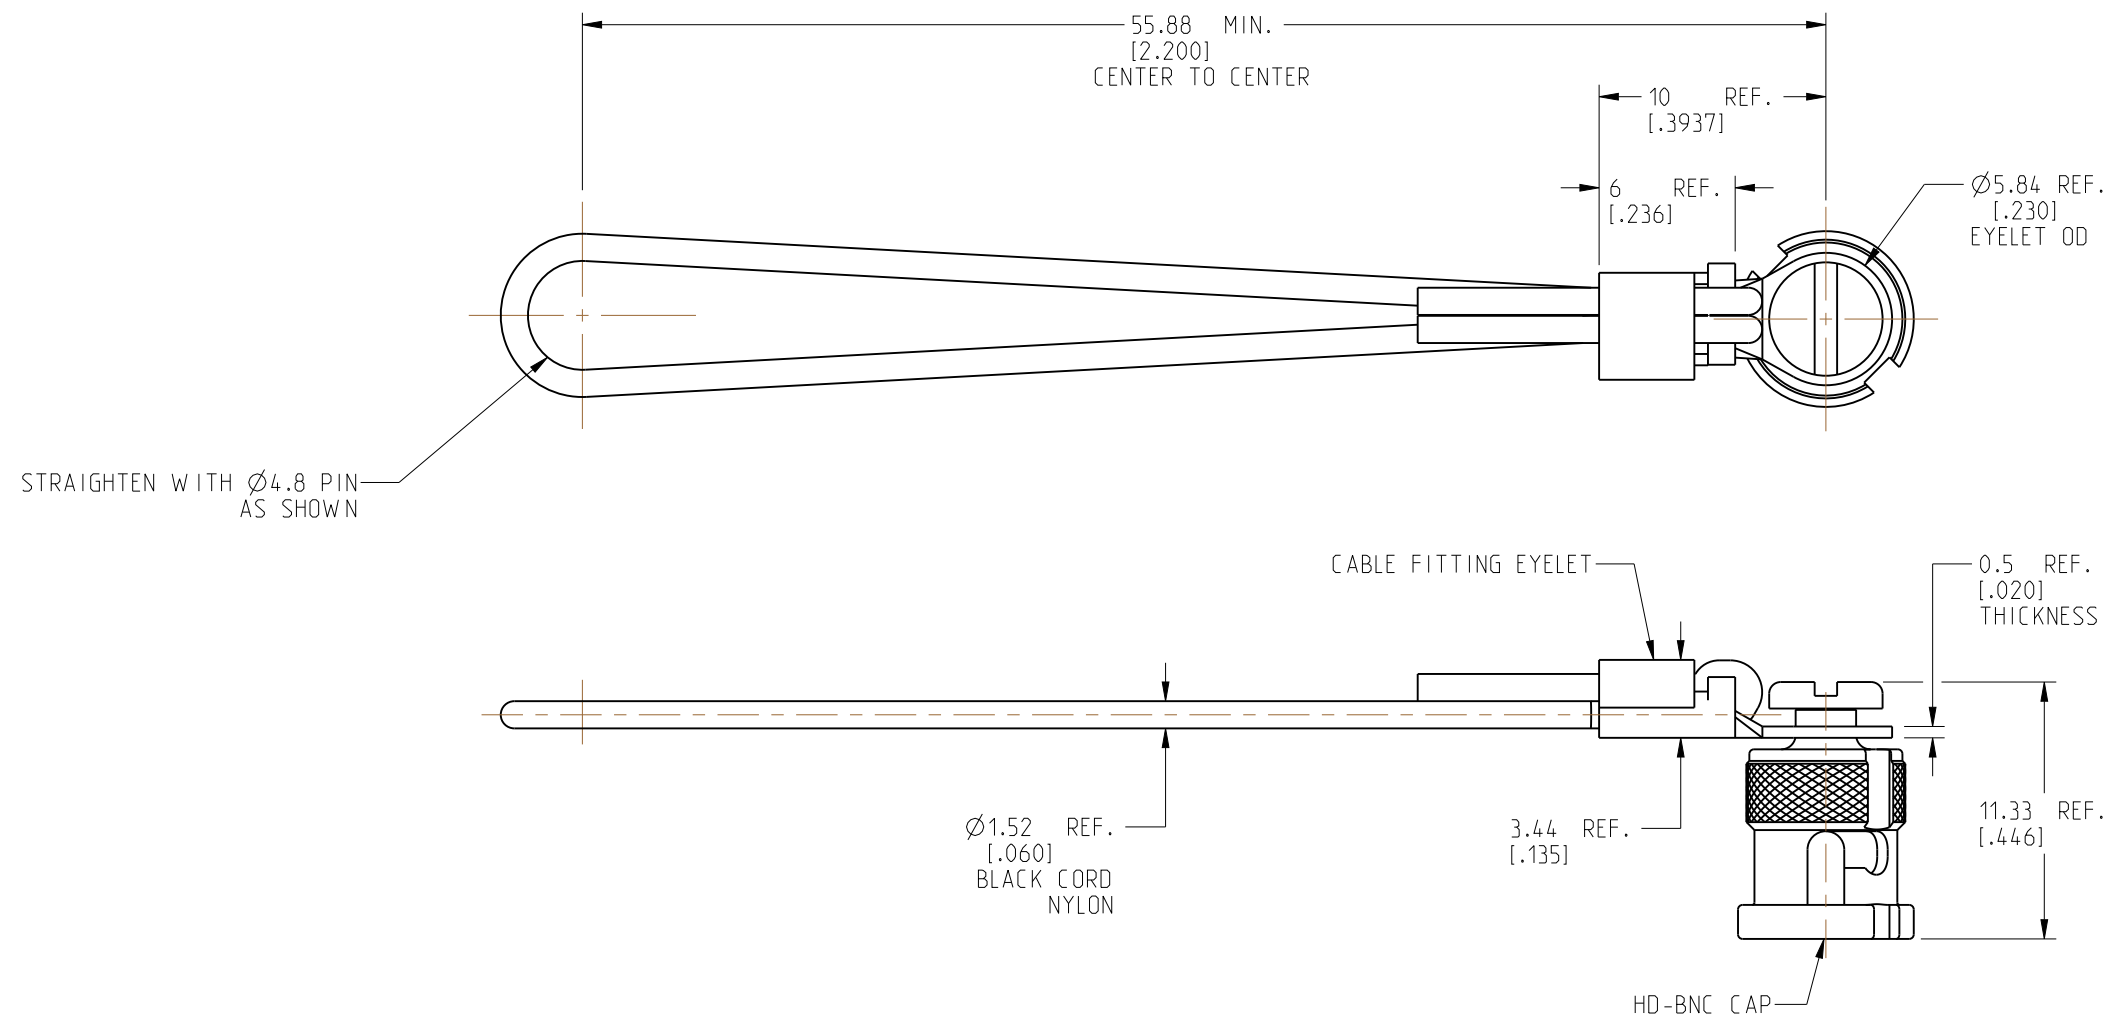


NOTES:

1. MATERIALS AND FINISHES:
 BAYONET SLEEVE & SCREW - STAINLESS STEEL, PASSIVATED
 CABLE FITTING EYELET - STAINLESS STEEL, PASSIVATED
 GASKET - FLUOROSILICONE PER MIL-DTL-25988, TYPE II
2. PACKAGING:
 A. QUANTITY: SINGLE PACK
 B. MARKING: BAG TO BE MARKED
 "AMPHENOL RF, 34-5054-1, AND DATE CODE"
3. MECHANICAL:
 A. ASSEMBLY TO WITHSTAND 50 LBS. PULL FORCE FROM CORD.
4. ENVIRONMENTAL:
 A. SEALING: IP-67 IN MATED CONDITION

REVISIONS				
REV	DESCRIPTION	DATE	ECN	APPR
A	RELEASE TO MFG.	13-JUL-20	14562	SH
B	55.88 MIN. WAS 55.88±5.08	03-JUN-26	17927	LQ

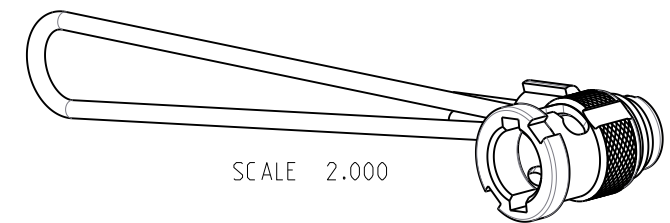

CUSTOMER OUTLINE DRAWING
 ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

NOTICE: These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE METRIC (INCHES) AND TOLERANCES ARE: <0.5mm = ±0.05mm [$<0.020 = \pm 0.002$] 0.5 - 6mm = ±0.1mm [$>0.020 - 0.236 = \pm 0.004$] >6.00 - 30mm = ±0.2mm [$>0.236 - 1.181 = \pm 0.008$] >30.00 - 120mm = ±0.3mm [$>1.181 - 4.725 = \pm 0.012$] ANGLES = ±1°		MATERIAL ENGR.1 WIKI ENGR.2 J.WANG DATE 20-OCT-15		TITLE CAP W/ LANYARD, IP67 HD-BNC PLUG SHEET NO. 2 OF 2 SCALE: 3.0:1.0		Amphenol RF DRAWING NO. 34-5054-1 ITEM NO. 34-5054-1 PART NO. 34-5054-1 REV B	
THIRD ANGLE PROJ. REFERENCE N/A EAR# 6369									