


- NOTES:
1. MATERIALS AND FINISHES:
BODY - BRASS (ASTM B16 H02, C36000 , NICKEL PLATING (.000100 THICK) OVER COPPER STRIKE
CONTACT - BERYLLIUM COPPER (ALLOY C17300, TD04, ASTM B196), GOLD PLATING (.000003 MIN THICK) OVER NICKEL
INSULATOR - PTFE (ASTM D 1710
2. ELECTRICAL:
A. IMPEDANCE: 75 OHM
B. FREQUENCY RANGE: DC - 2 GHz
C. INSULATION RESISTANCE: 5000 MEGA OHMS MIN.
D. CONTACT RESISTANCE:
OUTER: 0.2 MILLI OHMS MAX.
CENTER: 1.5 MILLI OHMS MAX
3. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL, 31-70268, AND DATE CODE"

31-70268		REVISIONS			
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ.	A	RELEASE TO MFG.	12/11/03	44739	CPM

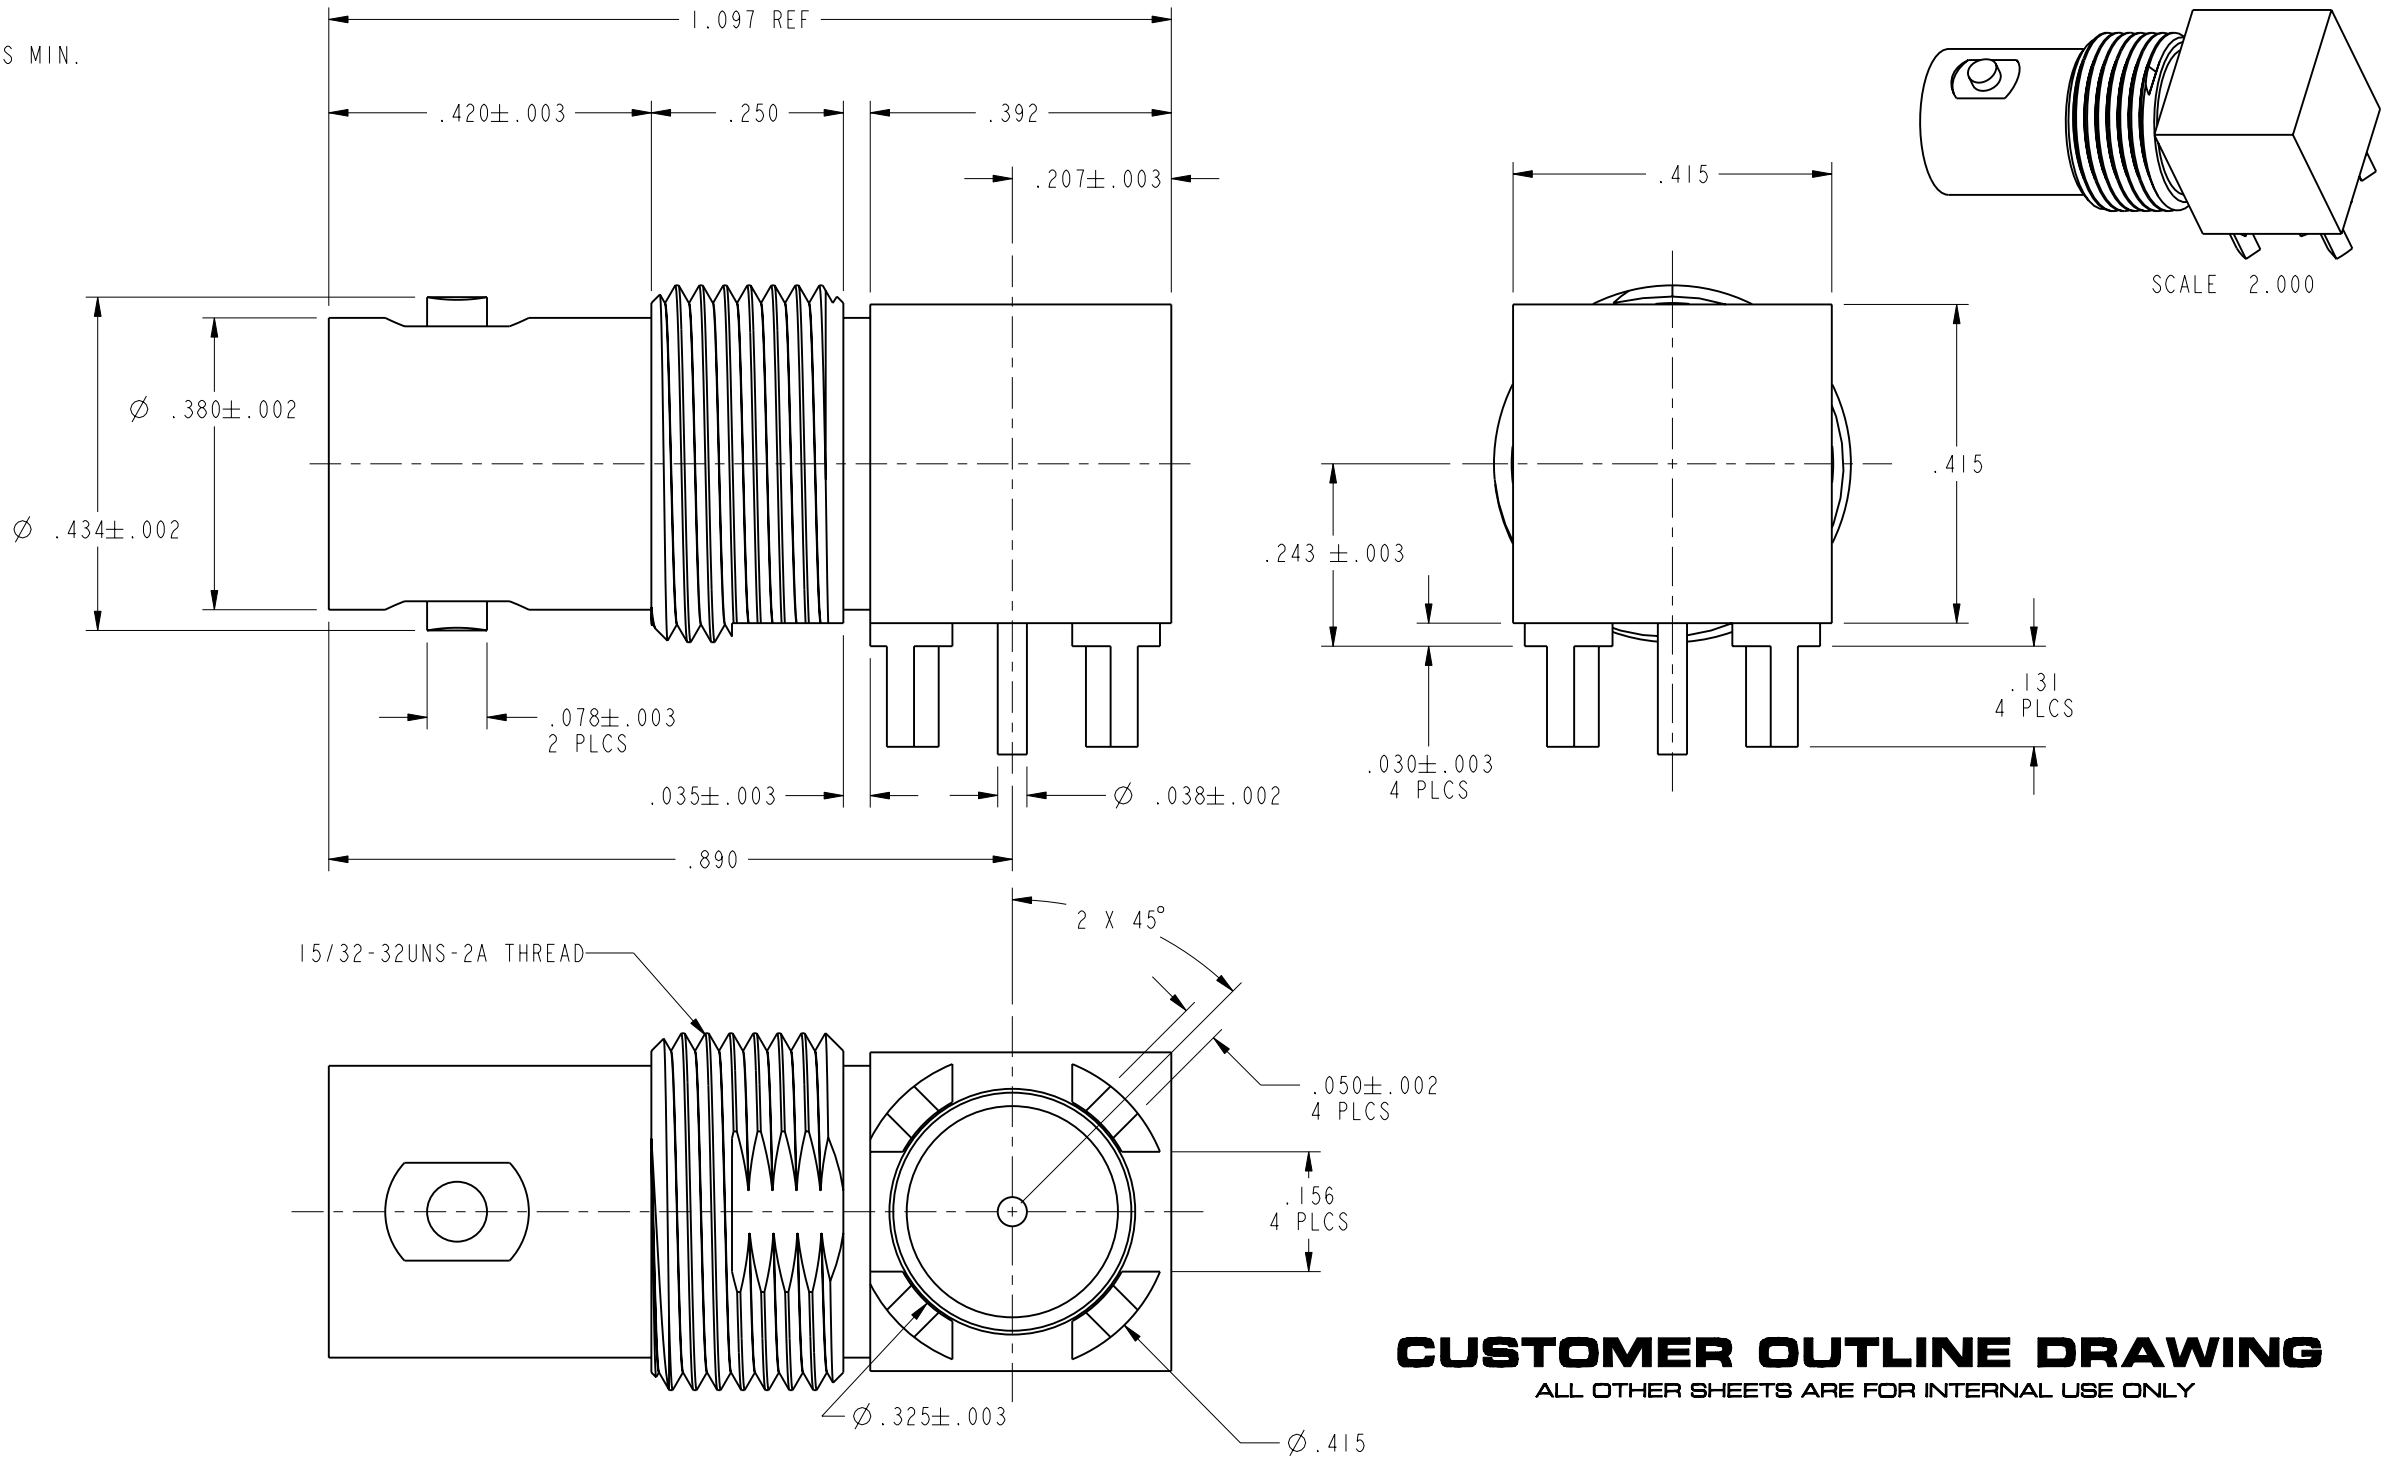

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1°	MATERIAL	DRAWN C. McGRATH	DATE 12-Aug-03	TITLE BNC JACK R/A PCB MOUNT 75 OHM		Amphenol RF Danbury, CT, USA Tainan, Taiwan Shenzhen, China www.amphenolrf.com	
	REFERENCE	ENGINEER K. CAPOZZI	DATE 12-Aug-03				
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.		APPROVED O. BARTHELMES	DATE 12/11/03			SCALE: 4.0:1 SHEET 2 OF 2	
		CAD FILE I:\BNC_75\31-70268		CODE ID 74868	DWG SIZE B	DRAWING NO. 31-70268	REV A