
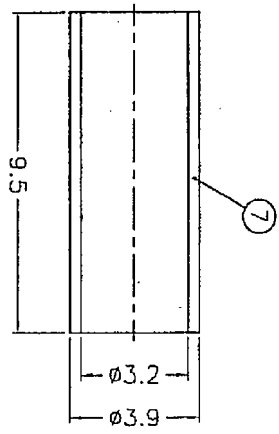
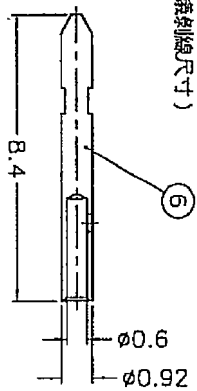


ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
A1	A-3	RROOM03A WAS SMA5000-4-B\N/A\07-29-08

REVISIONS

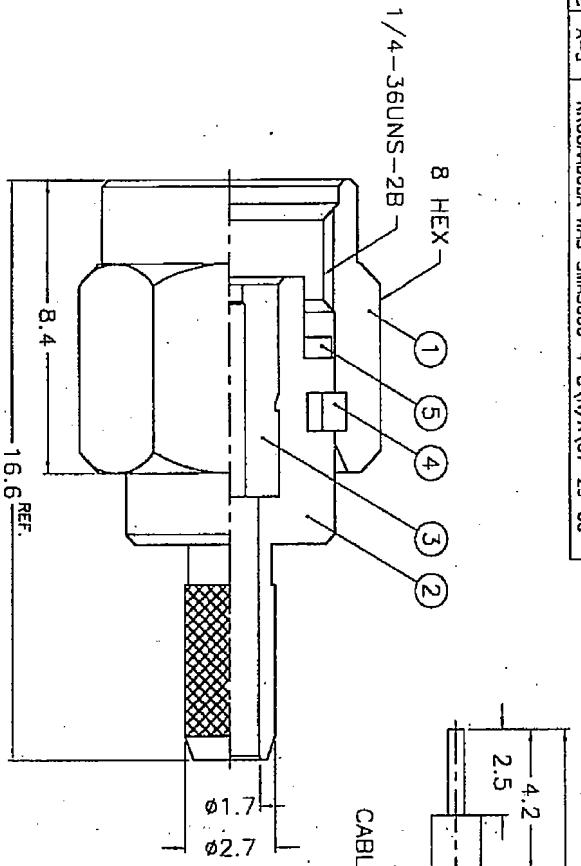

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 3. GOLD PL. 50 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 4. TEFION MIL-P-1946B
 5. JIS H 3250, C 2800
 6. PASSIVATED PER QQ-P-35
 7. STAINLESS STEEL PER QQ-S-764, TYPE 303

8	HEAT SHRINK TUBING	NOTE 5	NOTE 2	1	FR-39/32XB5
7	FERRULE	NOTE 1	NOTE 3	1	SMA1111A2-5-092/06
6	CONTACT PIN	NOTE 1	NOTE 3	1	SMA1111A2-5-092/06
5	GASKET	SILICONE	RED	1	GS-6/43X06
4	RETAINER RING	SUS 304	NATURAL	1	RROOM03A
3	INSULATOR	NOTE 4	NATURAL	1	SMA1111A2-3T-50-B
2	BODY	NOTE 1	NOTE 2	1	SMA1111A2-2-27/17-A
1	SHELL	NOTE 7	NOTE 6	1	SMA5000-1-D



NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DRAWING NO.
1	SHELL	NOTE 7	NOTE 6	1	SMA5000-1-D

SCALE	5/1	ISSUE	A2	FILE NO.
5/1	ISSUE	A2	FILE NO.	111122\316U-50\3GT50G-A254

PART NO.	132174-10
APPROVED	DATE 14 Aug 08
CHECKED	DATE 29 Jul 08
DRAWN	DATE 29 Jul 08
TITLE	Danbury, CT, USA - Tainan, Taiwan - Shenzhen, China
DRAWING NO.	SMA111122-3GT50G-316U-50
ITEM NO.	111111AAK36GASf

Amphenol

1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER



PD-OK 28126