


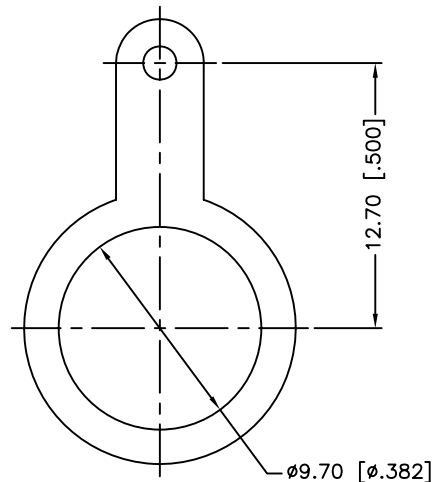
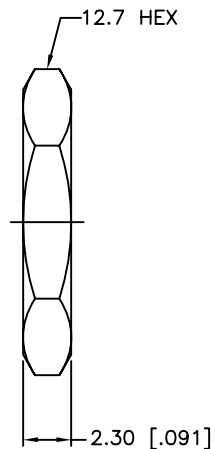


REV.	DATE	ECR NO.	DESCRIPTION
NC	07/23/10	XXXXXX	INITIAL RELEASE

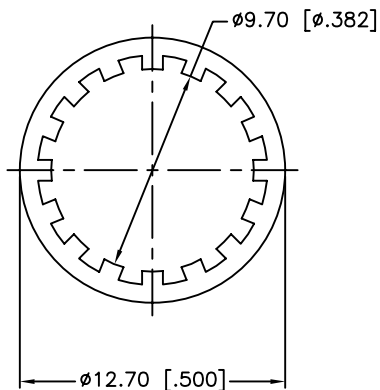

RECOMMENDED
MOUNTING HOLE

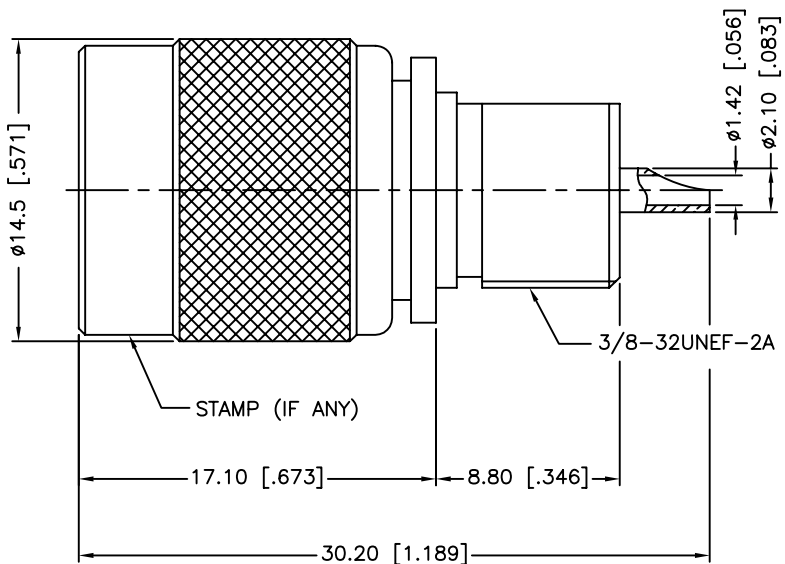

12	SOLDER TAG	BRASS	NICKEL	1
11	HEX NUT	BRASS	NICKEL	1
10	LOCK WASHER	BRASS	NICKEL	1
9	SHELL	BRASS	NICKEL	1
8	GASKET	SILICONE	RED	1
7	TETAINER RING	BRASS	NICKEL	1
6	RING	DELIRIN	NATURAL	1
5	WASHER	BRASS	NICKEL	1
4	INSULATOR	PTFE	NATURAL	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	DELIRIN	NATURAL	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	07/23/10
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/122331.DWG

Amphenol Connex			
PART DESCRIPTION			
TNC BULKHEAD RECEPTACLE. PLUG (FOR 75Ω OHM)			
PART NO.			
122331			
DWG. NO.	122331.DWG	REV.	NC
SIZE	A	SCALE	NA

1. MAX. PANEL THICKNESS=4.5mm